

Ident. No. 3523

LANGLEY SUB-LIBRARY

*11071-107 X-4/4
1104
c.2*



RESEARCH MEMORANDUM

STABILITY AND CONTROL DATA OBTAINED FROM FOURTH AND FIFTH
FLIGHTS OF THE NORTHEROP X-4 AIRPLANE (A.F. No. 46-676)

By

George M. Valentine

Langley Aeronautical Laboratory
Langley Air Force Base, Va.

~~CLASSIFICATION CHANGED TO
CONFIDENTIAL~~

To UNCLASSIFIED

CLASSIFICATION CHANGED

By authority of NACA Release Form Date
2452 Dec Aug. 18, 1954

Authority *NACA Release Form* Date *May 15, 1951*
70.245
of Bunting See *May 22, 1951*

This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Act, USC 5021 and 5022. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law. Information so classified may be imparted only to persons whose military and naval services of the United States, appropriate civilian officers and employees of the Federal Government who have a legitimate interest therein, and to United States citizens of known loyalty and discretion who of necessity must be informed thereof.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

4 AUG 1949

map 8-24-54

NACA LIBRARY
LANGLEY AERONAUTICAL LABORATORY
Langley Field, Va.



NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

STABILITY AND CONTROL DATA OBTAINED FROM FOURTH AND FIFTH
FLIGHTS OF THE NORTHROP X-4 AIRPLANE (A.F. No. 46-676)

By George M. Valentine

SUMMARY

NACA instrumentation has been installed in the Northrop X-4 airplane to obtain stability and control data during the Northrop conducted acceptance tests. The results of the fourth and fifth flights of the Northrop X-4 number 1 airplane are presented in this paper. These data were obtained for a center-of-gravity position of approximately 19.5 percent of the mean aerodynamic chord.

The results of this flight showed that the directional stability as measured in steadily increasing sideslips was positive and high and that the effective dihedral was positive. The results also show the airplane to be longitudinally stable, stick fixed, with the center of gravity at 19.5 percent of the mean aerodynamic chord.

INTRODUCTION

As a part of the Air Force-Navy-NACA transonic-flight research program, the Northrop Company has constructed the X-4 airplane. This airplane is intended for performing research on a tailless configuration at high subsonic Mach numbers.

NACA recording instrumentation has been installed in the airplane to provide data on stability and control characteristics during the Northrop conducted acceptance tests. The present paper gives data obtained on the fourth and fifth flights made May 20, 1949 and May 25, 1949, respectively, with the center of gravity at approximately 19.5 percent of the mean aerodynamic chord. The speed range covered was 140 to 340 miles per hour indicated airspeed at approximately 15,000 feet pressure altitude.

SYMBOLS

V_i	indicated airspeed, miles per hour
β	sideslip angle, degrees
δ_e	elevon angle, degrees
δ_r	rudder angle, degrees
$\delta_{eR} - \delta_{eL}$	effective aileron angle, degrees
q	dynamic pressure, pounds per square foot
S	wing area, square feet
W	airplane weight, pounds
C_N	airplane normal-force coefficient $\left(\frac{Wn}{qS}\right)$
n	normal acceleration

Subscripts:

L, R left and right elevons, respectively

AIRPLANE

The Northrop X-4 airplane is a semitailless research airplane having a vertical tail but no horizontal-tail surfaces. It is powered by two Westinghouse J-30-WE-7-9 engines and is designed for flight research in the high subsonic speed range. Photographs of the airplane are presented in figure 1 and a three-view drawing as figure 2. Table I lists the physical characteristics of the airplane.

TEST INSTRUMENTATION

Because of the small size of the X-4 airplane and the instrumentation requirements for the Northrop structure and engine-temperature measurements, it was possible to install only a minimum of stability and control instrumentation. Standard NACA internal instruments record altitude, airspeed, angle of sideslip, right and left elevon positions,

and rudder position. In addition, the following quantities are telemetered to a ground station: normal acceleration, altitude, airspeed, right and left elevon positions, and rudder position. The telemeter was used during flight 4 but was not used during flight 5 because of interference with the Northrop temperature-measuring instruments. All of the records are correlated by a common timer.

The recording airspeed and altimeter are connected to the airspeed head on the vertical fin.

RESULTS AND DISCUSSION

In flight 4, the pilot made records of steady sideslips at several sideslip angles at constant speeds of 280 miles per hour and 175 miles per hour indicated airspeed. The pilot also made records of elevator position for trim at two speeds, 194 and 256 miles per hour indicated airspeed in the clean configuration, and at 140 miles per hour indicated airspeed in the landing configuration with flaps retracted and gear down. Data during a descent with dive brakes open and landing were also obtained.

In flight 5, records were taken of elevator position for trim at five speeds, 135, 152, 203, 275, and 340 miles per hour indicated airspeed, in the clean configuration, and elevator position for trim at three speeds, 151, 174, and 216 miles per hour indicated airspeed in the landing configuration with gear down and flaps retracted. Records were also taken of the lateral oscillations resulting from releasing the elevon from a steady sideslip with rudder "fixed" and releasing the rudder from a steady sideslip with rudder "free." Record of the landing was also taken.

A measure of the stick-fixed stability is shown in the upper portion of figure 3 and in figure 4 where the longitudinal control angle $\frac{\delta_{eR} + \delta_{eL}}{2}$ is plotted against indicated airspeed V_1 and normal-force coefficient C_N . These data show that in the clean and in the gear-down flaps-retracted configurations the airplane is stable as shown by the increase in longitudinal control angle for trim with an increase in C_N . Acceleration of g was assumed to compute normal-force coefficient for flight 5. Data for determining values of C_N for these runs during flight 4 were not complete; hence, no data for flight 4 are included in figure 4. Included also in figure 3 is the lateral trim required for the speeds tested for gear-up and gear-down configurations.

Results of the measurements made in steady sideslips in flight 4 are given in figures 5 and 6 for which the rudder angle δ_r and

effective aileron angle $\delta_{e_R} - \delta_{e_L}$ are plotted against sideslip angle β . These data show that the directional stability is positive and high as measured by the variations of rudder angle with sideslip angle, and the effective dihedral is positive as measured by the variations of effective aileron angle with sideslip angle. As expected, the effective dihedral increases with an increase in C_N . The variations of rudder angle with sideslip angle were 2.05° rudder angle per degree of sideslip angle at 175 miles per hour indicated airspeed and 1.90° rudder angle per degree of sideslip angle at 280 miles per hour indicated airspeed. The variations of effective aileron angle with sideslip angle were 0.66° effective aileron angle per degree of sideslip angle at 175 miles per hour indicated airspeed and 0.27° effective aileron angle per degree of sideslip angle at 280 miles per hour indicated airspeed.

Figures 7 and 8 are time histories of the lateral oscillations made by releasing the rudder from a steady sideslip of approximately 4° in flight 4. These data show that the oscillations were damped, but any exact measurement of damping is difficult because of elevon movement.

Figures 9 and 10 are time histories of lateral oscillations made by releasing the elevon from a steady sideslip and releasing the rudder from a steady sideslip, respectively, in flight 5. Data were taken after the disturbance had been made. In the elevon release with rudder fixed, the period of oscillation was 1.4 seconds per cycle, and the time required to damp to one-half maximum amplitude was 3.8 seconds. In the rudder release with rudder free, the period of oscillation was 1.5 seconds per cycle and the time required to damp to one-half amplitude was 3.1 seconds. These damping characteristics do not meet the specifications as set forth in the U. S. Air Force specifications no. 1815-B as being satisfactory.

Figure 11 is a time history of quantities measured during dive-brake operation. At time approximately 35 seconds with the airspeed stabilized at 270 miles per hour and with about 20 percent maximum power, the dive brakes were deflected 40 percent maximum deflection (pilot observation). Sinking speed of the order of 6000 feet per minute were recorded. Dive-brake deflection and flight conditions before time 35 seconds were not constant.

Time histories of the landings are given in figures 12 and 13 for flights 4 and 5, respectively. In flight 4, ground contact was made at 140 miles per hour indicated airspeed at a normal-force coefficient of about 0.67. The maximum up longitudinal control angle used was 14.6° . In flight 5, ground contact was made at 147 miles per hour indicated airspeed at a normal-force coefficient of 0.60. The maximum up longitudinal control angle used was 14.7° .

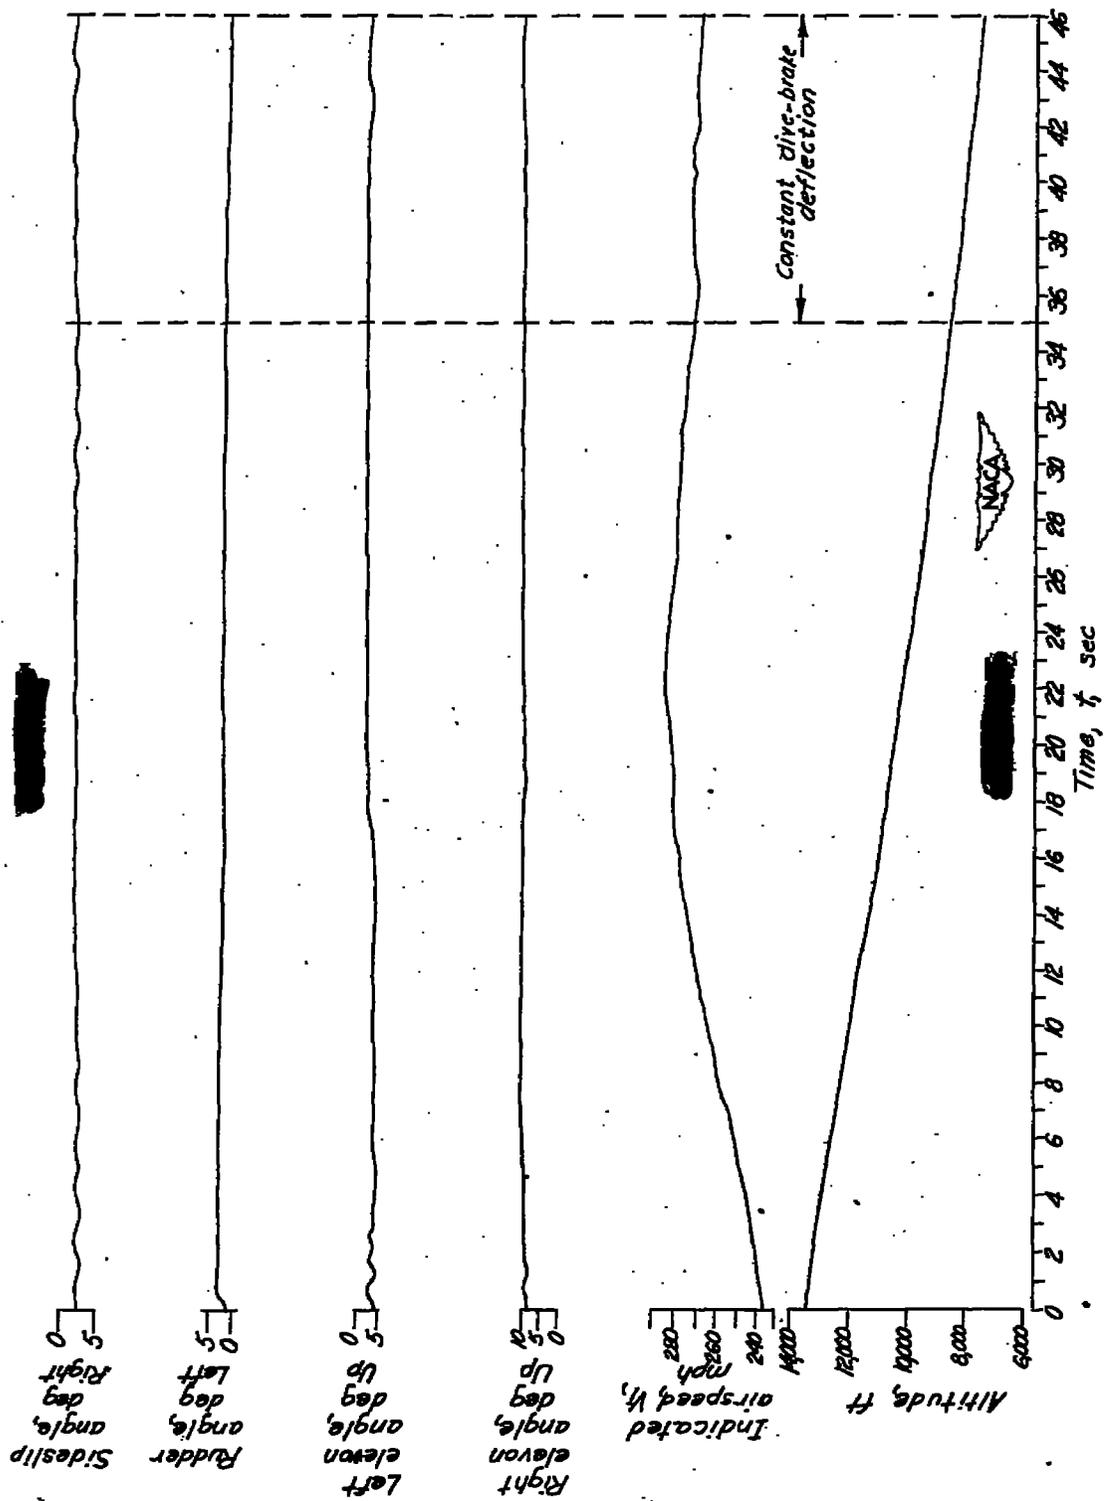


Figure 11.- Time history of descent with dive brakes open for I-4 airplane.

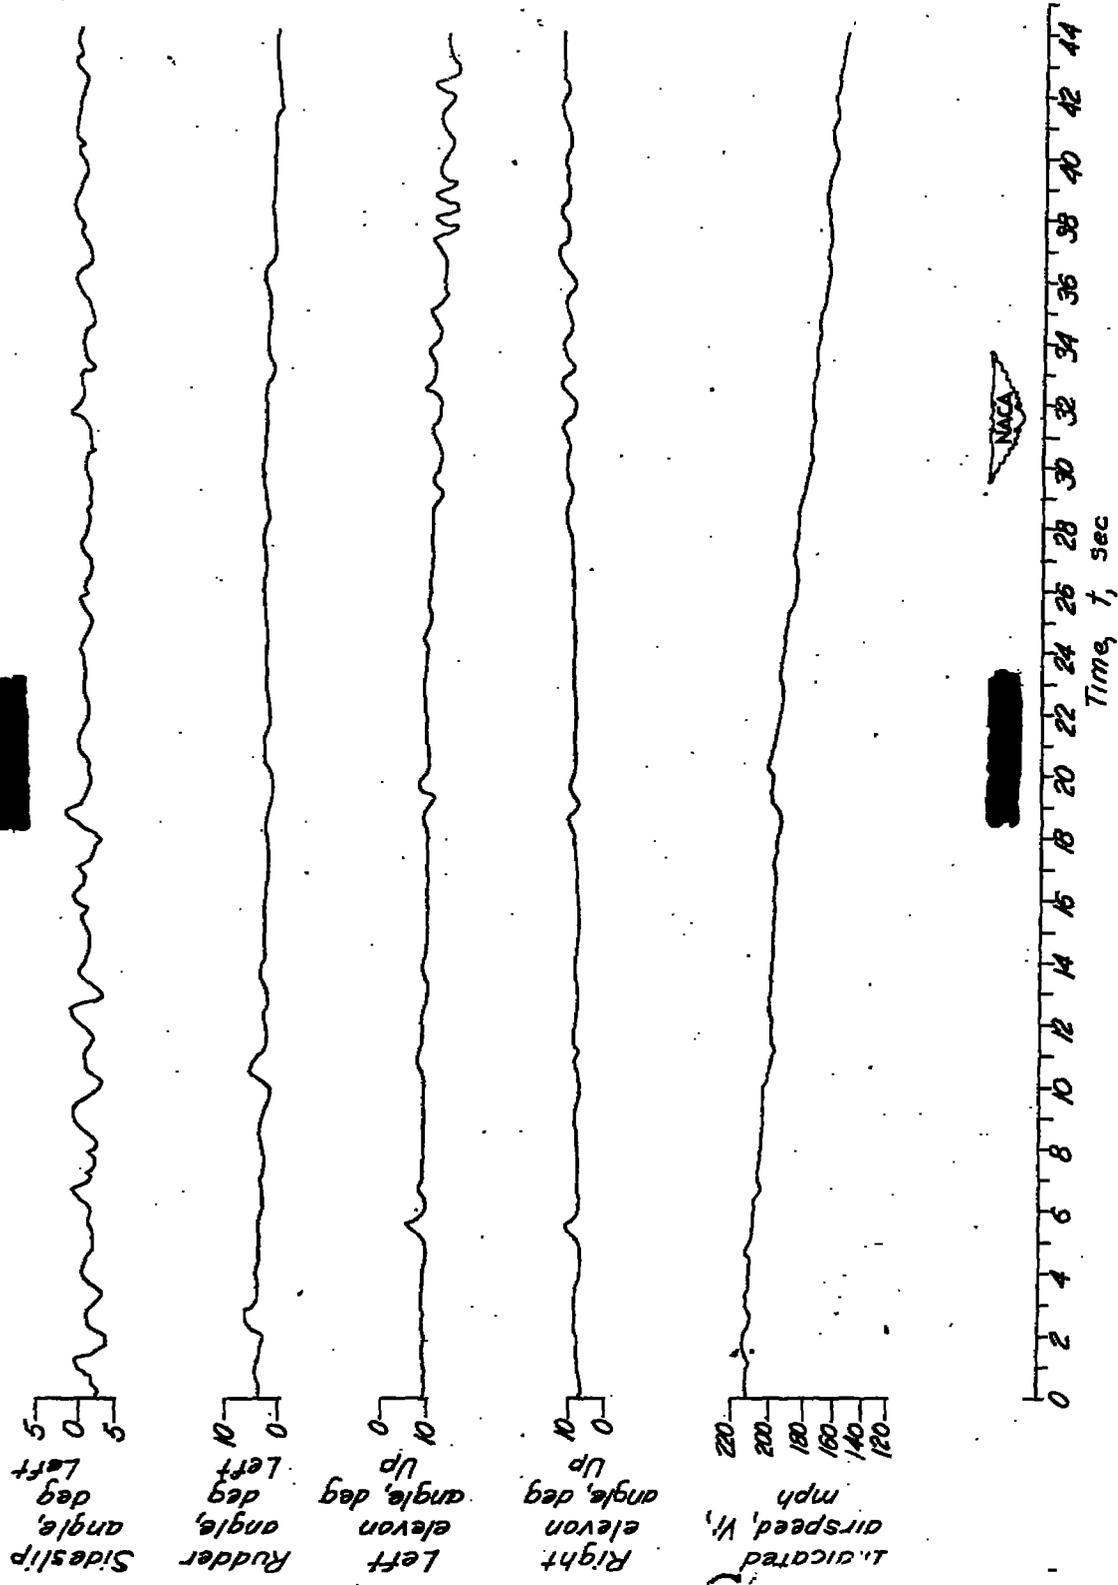


Figure 12.- Time history of landing for flight no. 4 for I-4 airplane.

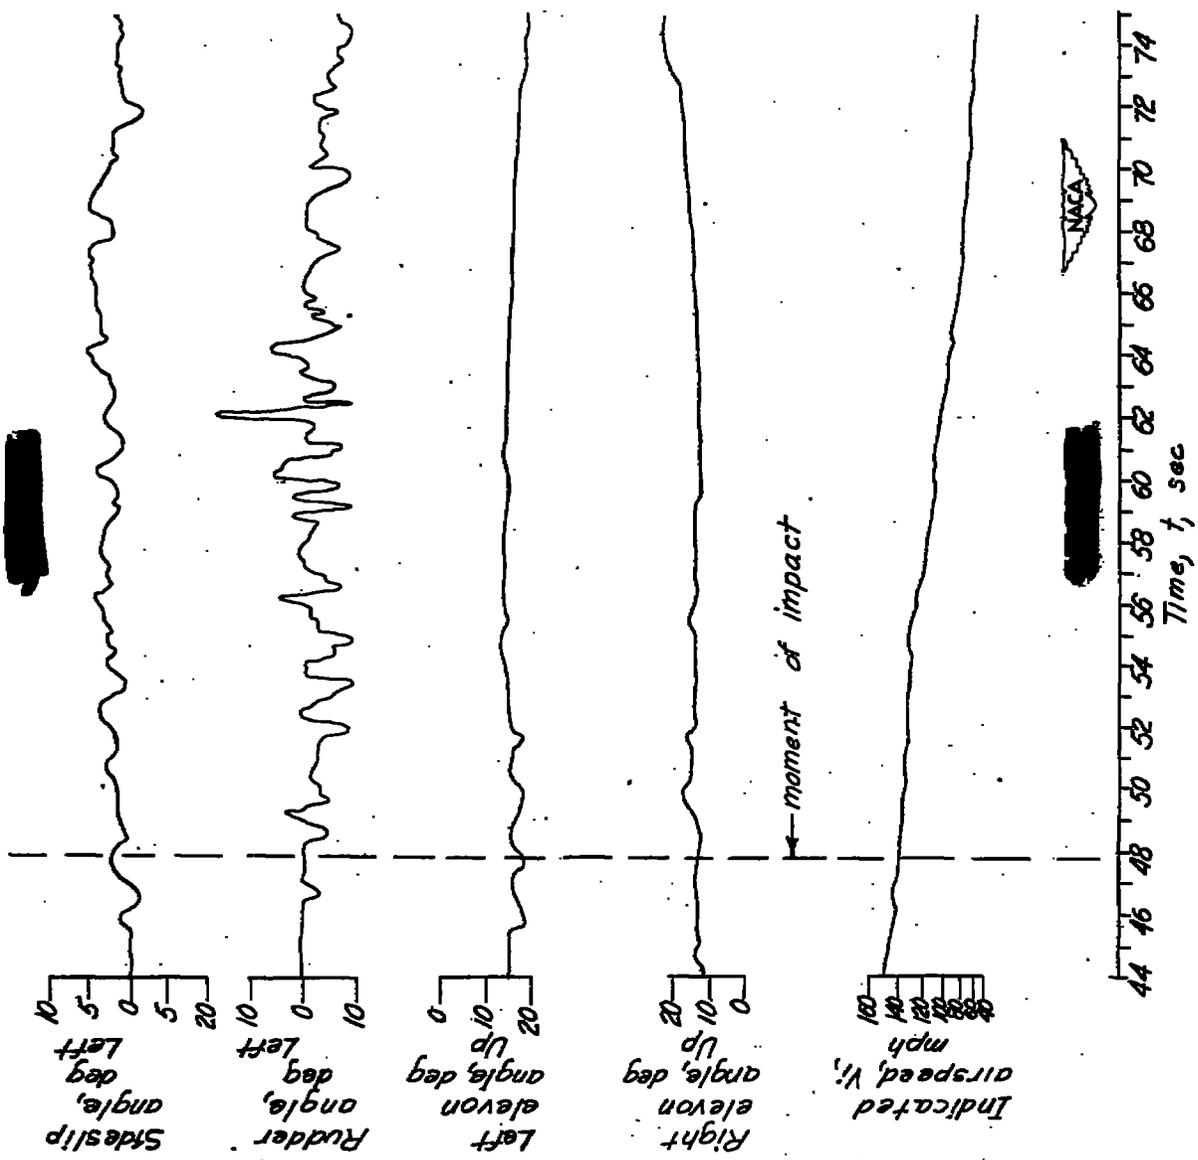


Figure 12.- Concluded.

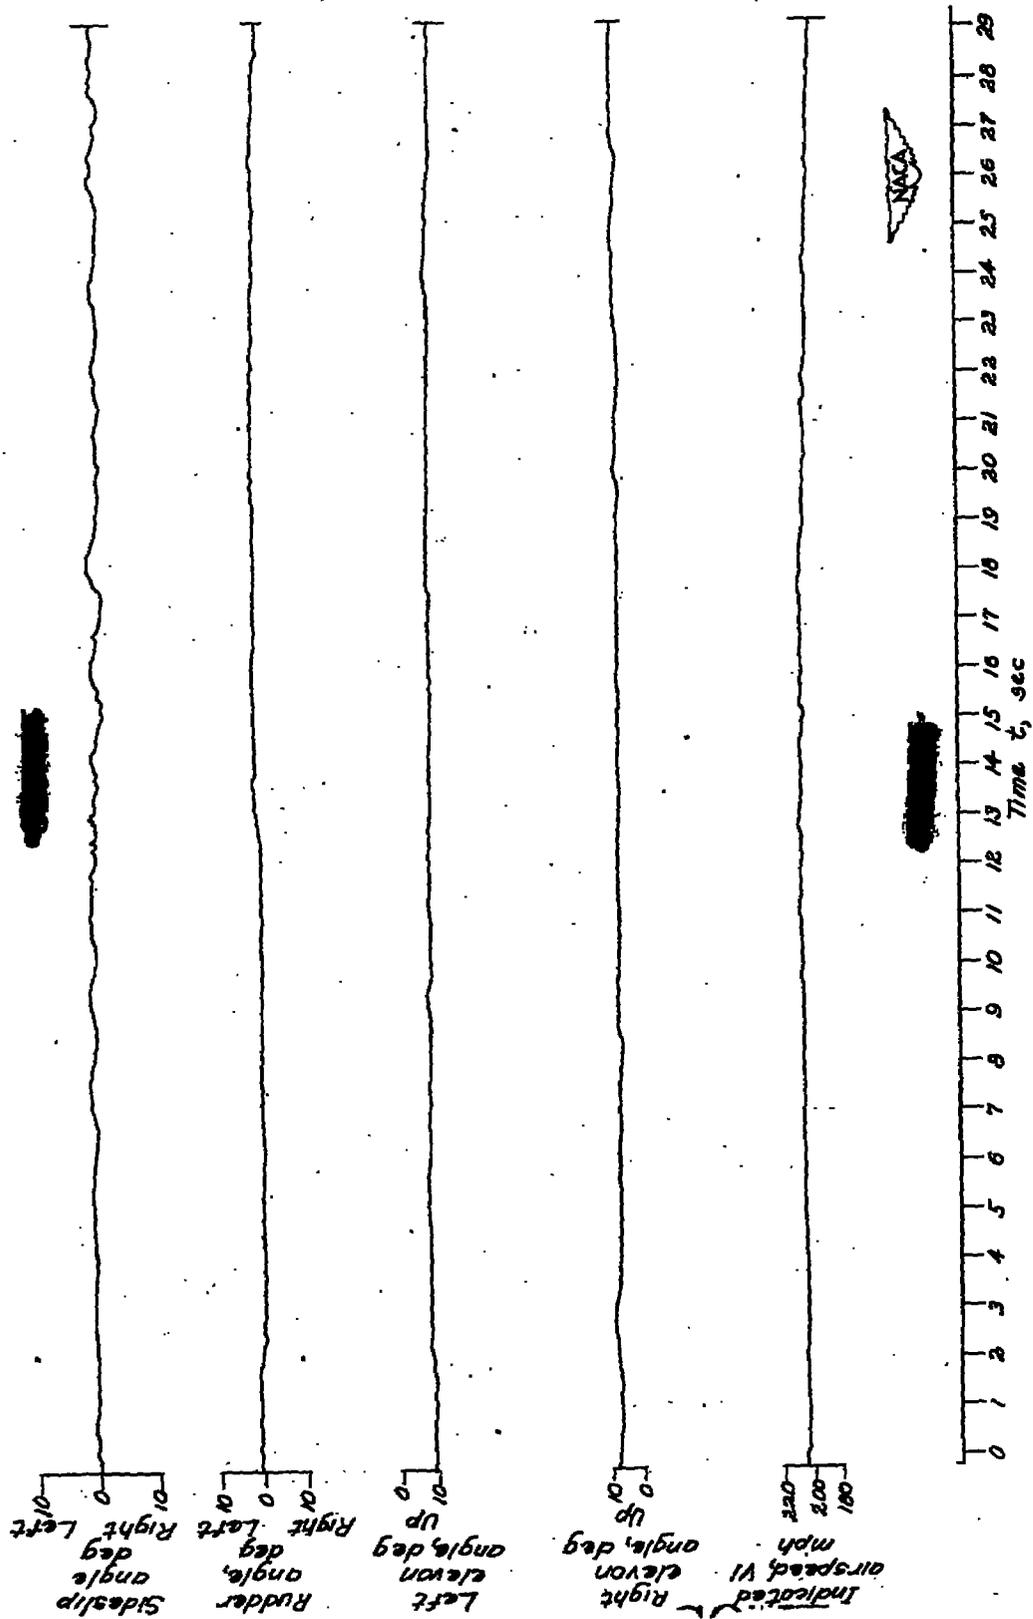


Figure 13.- Time history of landing for flight 5 for X-4 airplane.

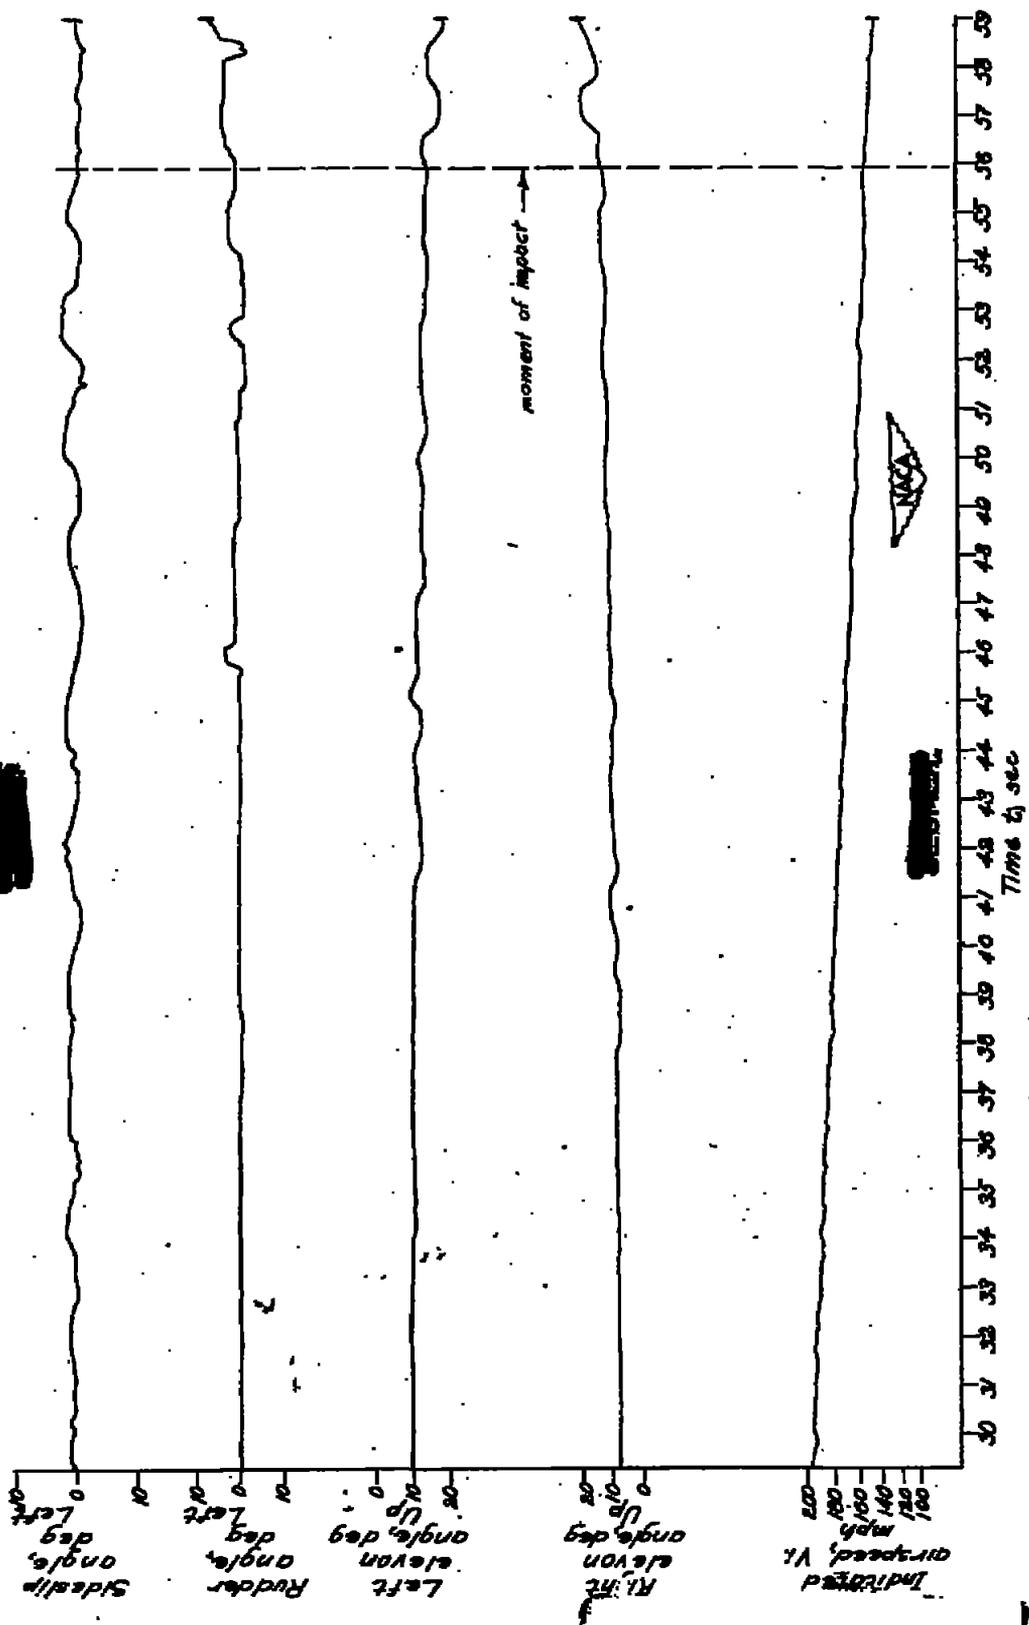


Figure 13.- Concluded.

INDEX

<u>Subject</u>	<u>Number</u>
Airplanes - Specific Types	1.7.1.2
Stability, Longitudinal - Static	1.8.1.1.1
Stability, Lateral - Static	1.8.1.1.2
Stability, Directional - Static	1.8.1.1.3
Flying Qualities	1.8.5

ABSTRACT

Results are presented from the fourth and fifth flights of the NACA instrumented Northrop X-4 semitailless research airplane.

Data presented from steady level runs from 140 to 340 miles per hour which showed the airplane to be longitudinally stable, stick fixed, in the clean configuration and in the gear-down flaps-retracted configuration.

Data also are presented from steady sideslip characteristics at 175 and 280 miles per hour which show that the directional stability is positive and high and lateral stability is positive.

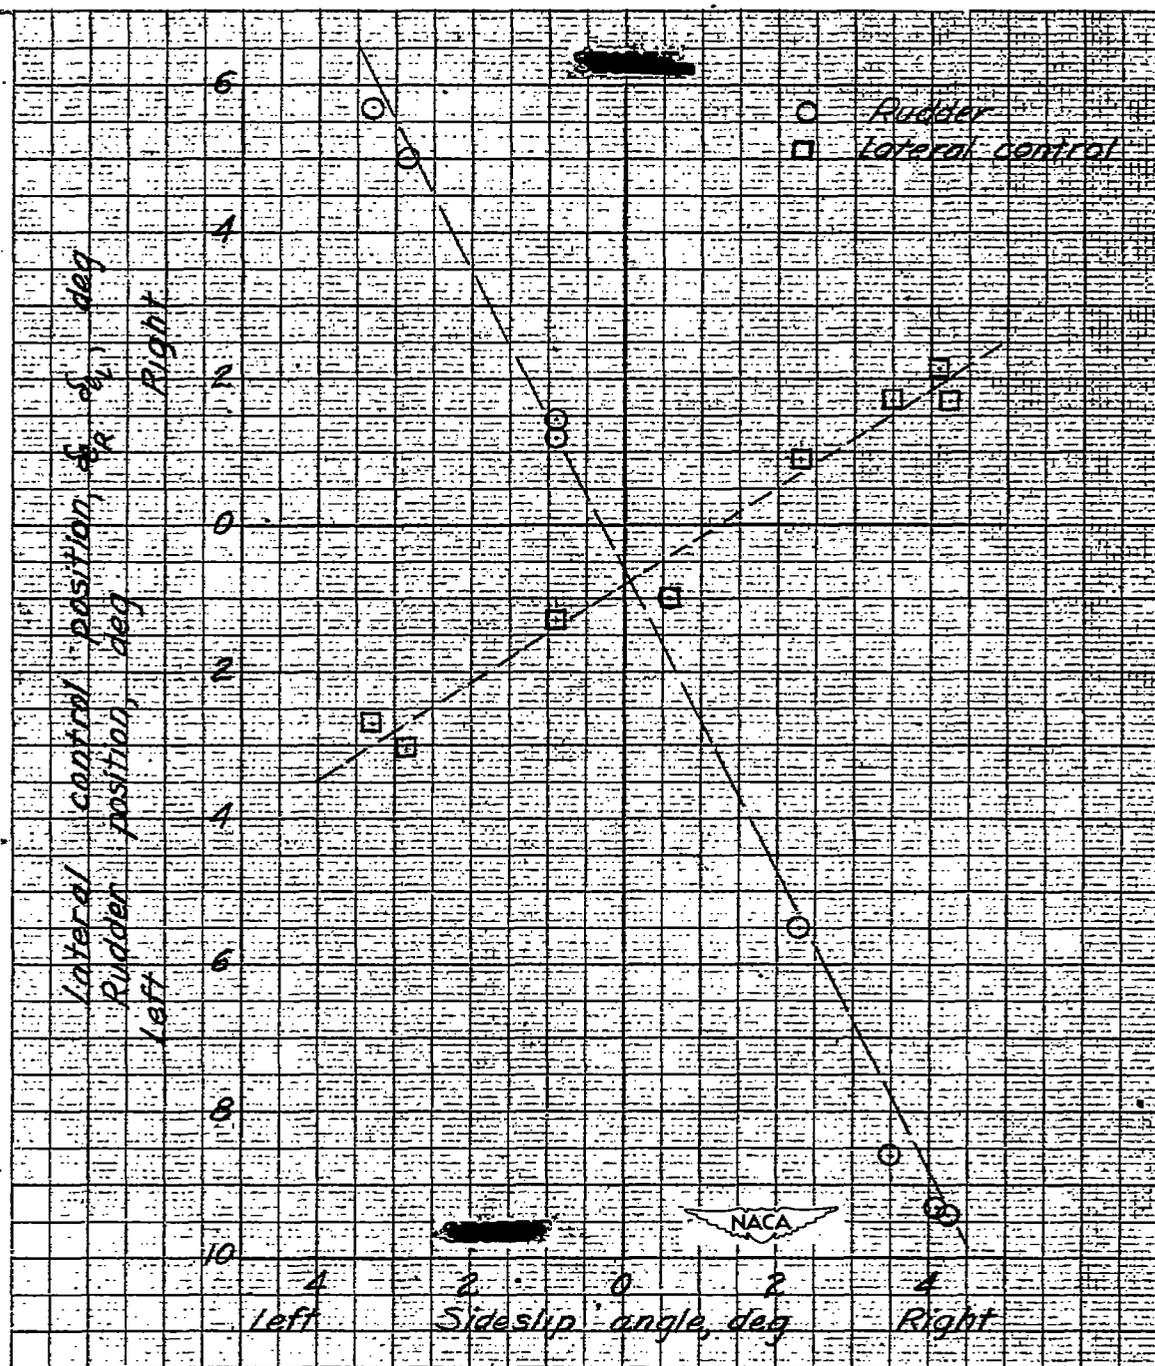


Figure 5.- Lateral-control position and rudder position at various sideslip angles at 175 miles per hour indicated airspeed, X-4 airplane.

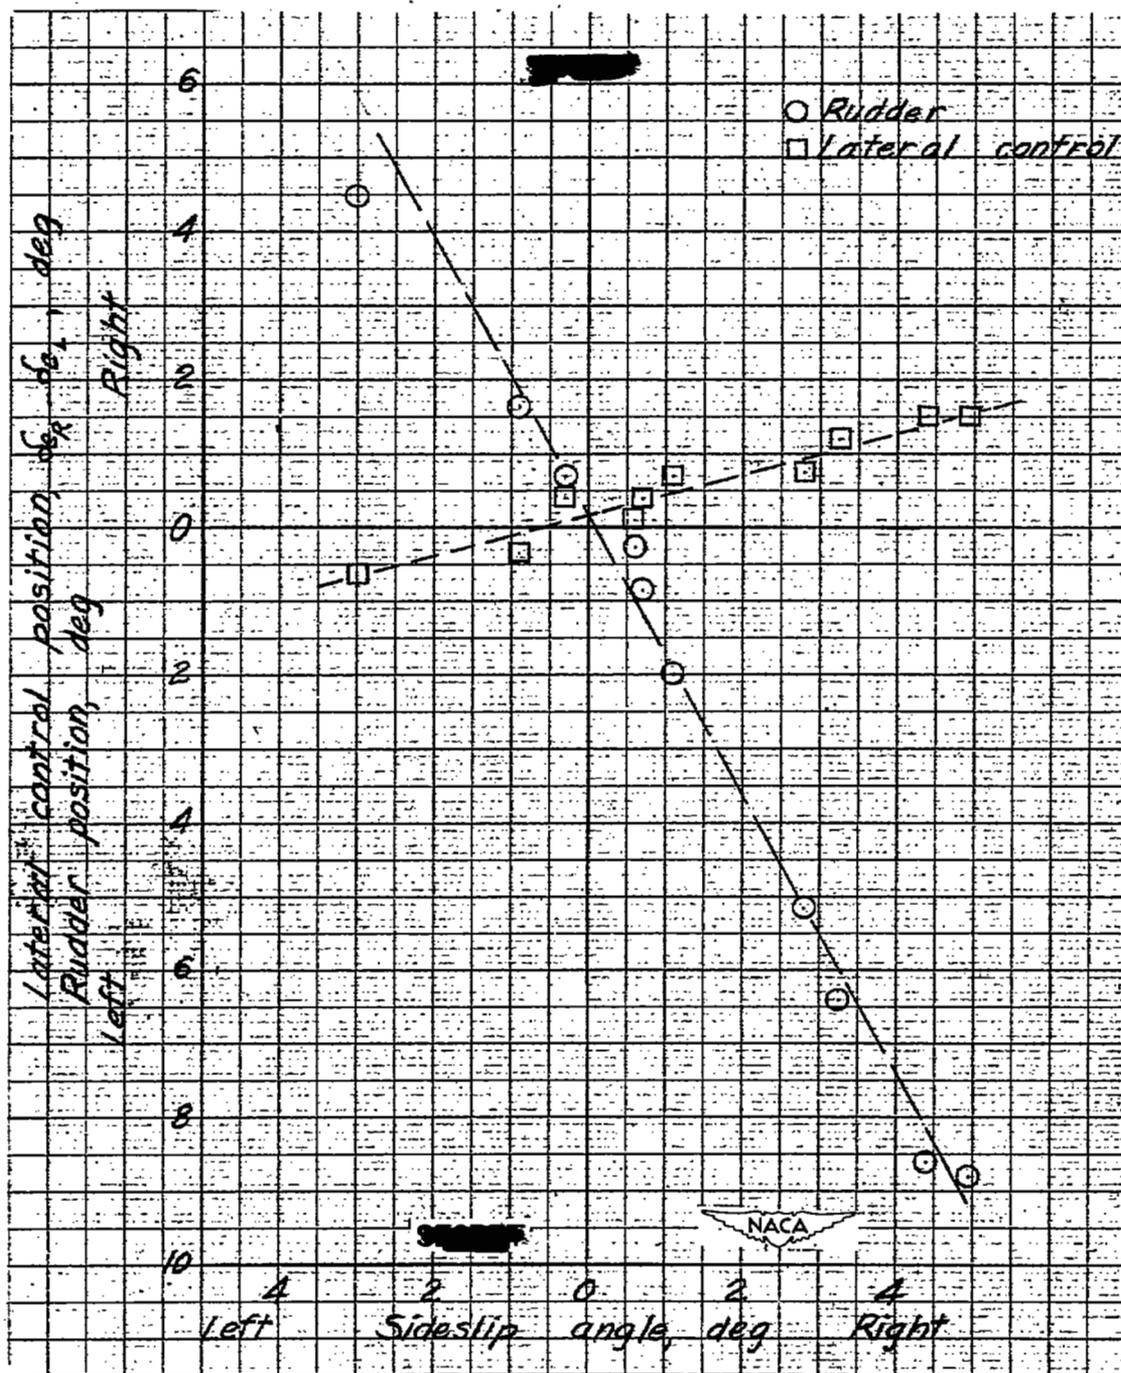


Figure 6.- Lateral-control position and rudder position at various sideslip angles at 280 miles per hour indicated airspeed, X-4 airplane.

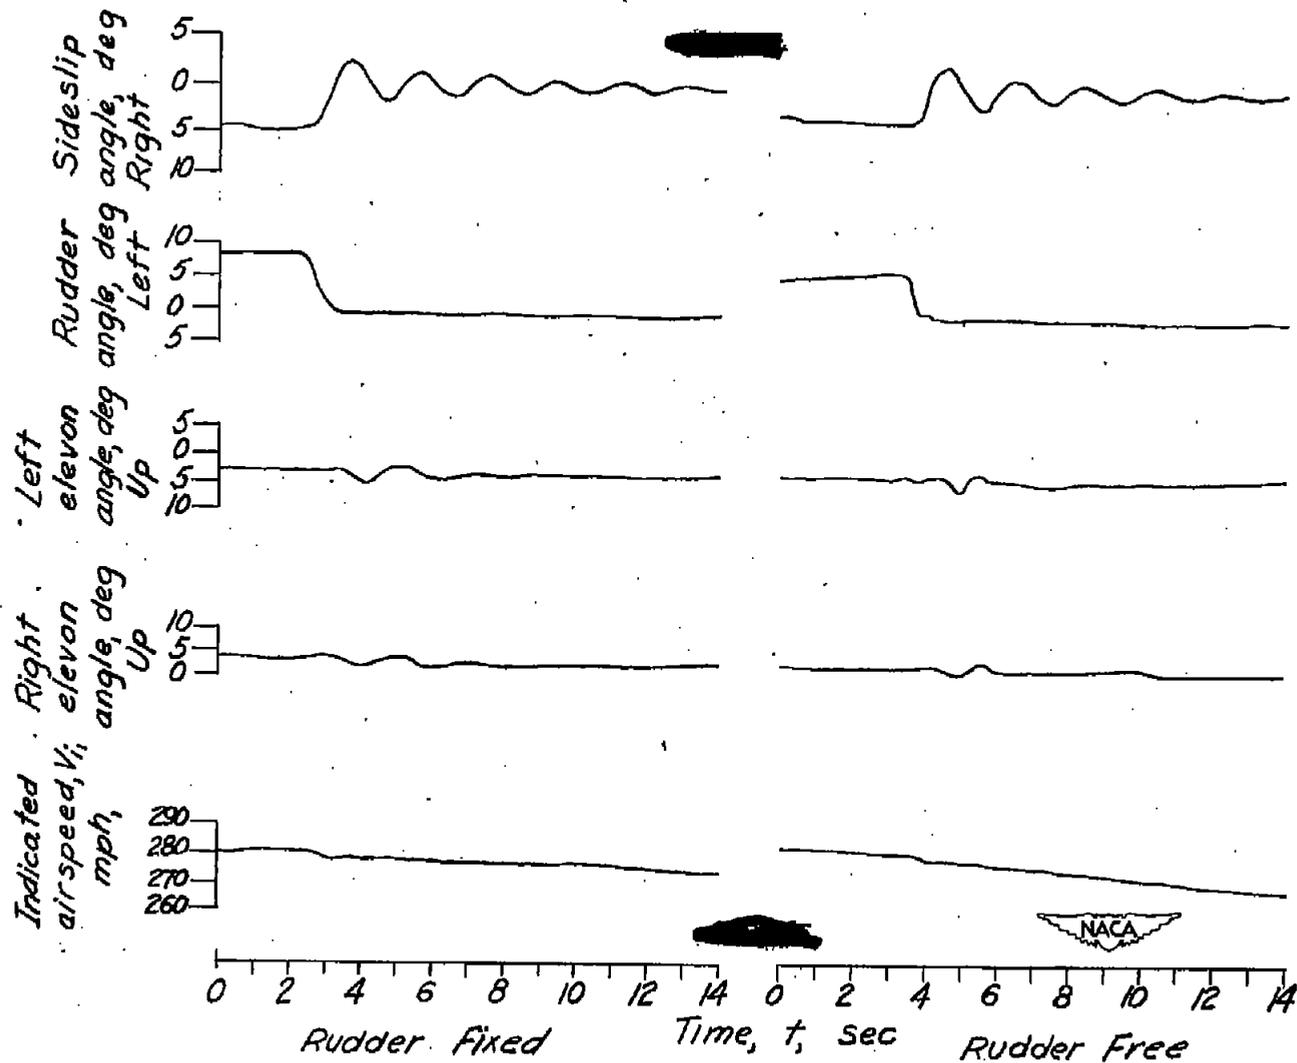


Figure 7.- Time history of rudder releases in steady sideslips for X-4 airplane.

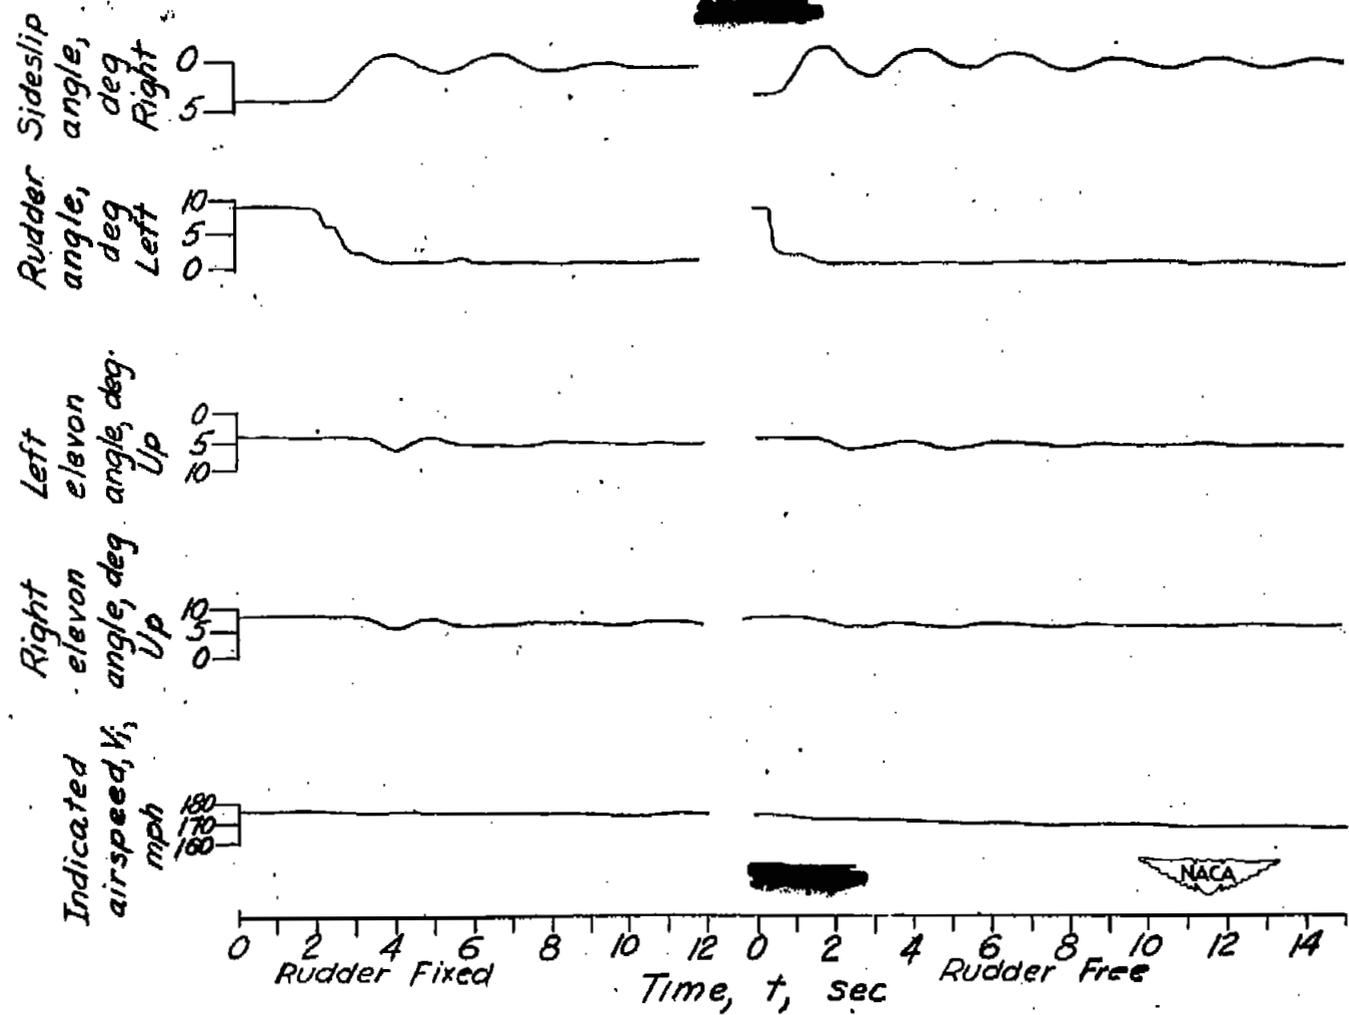


Figure 8.- Time history of rudder releases in steady sideslip for X-4 airplane.

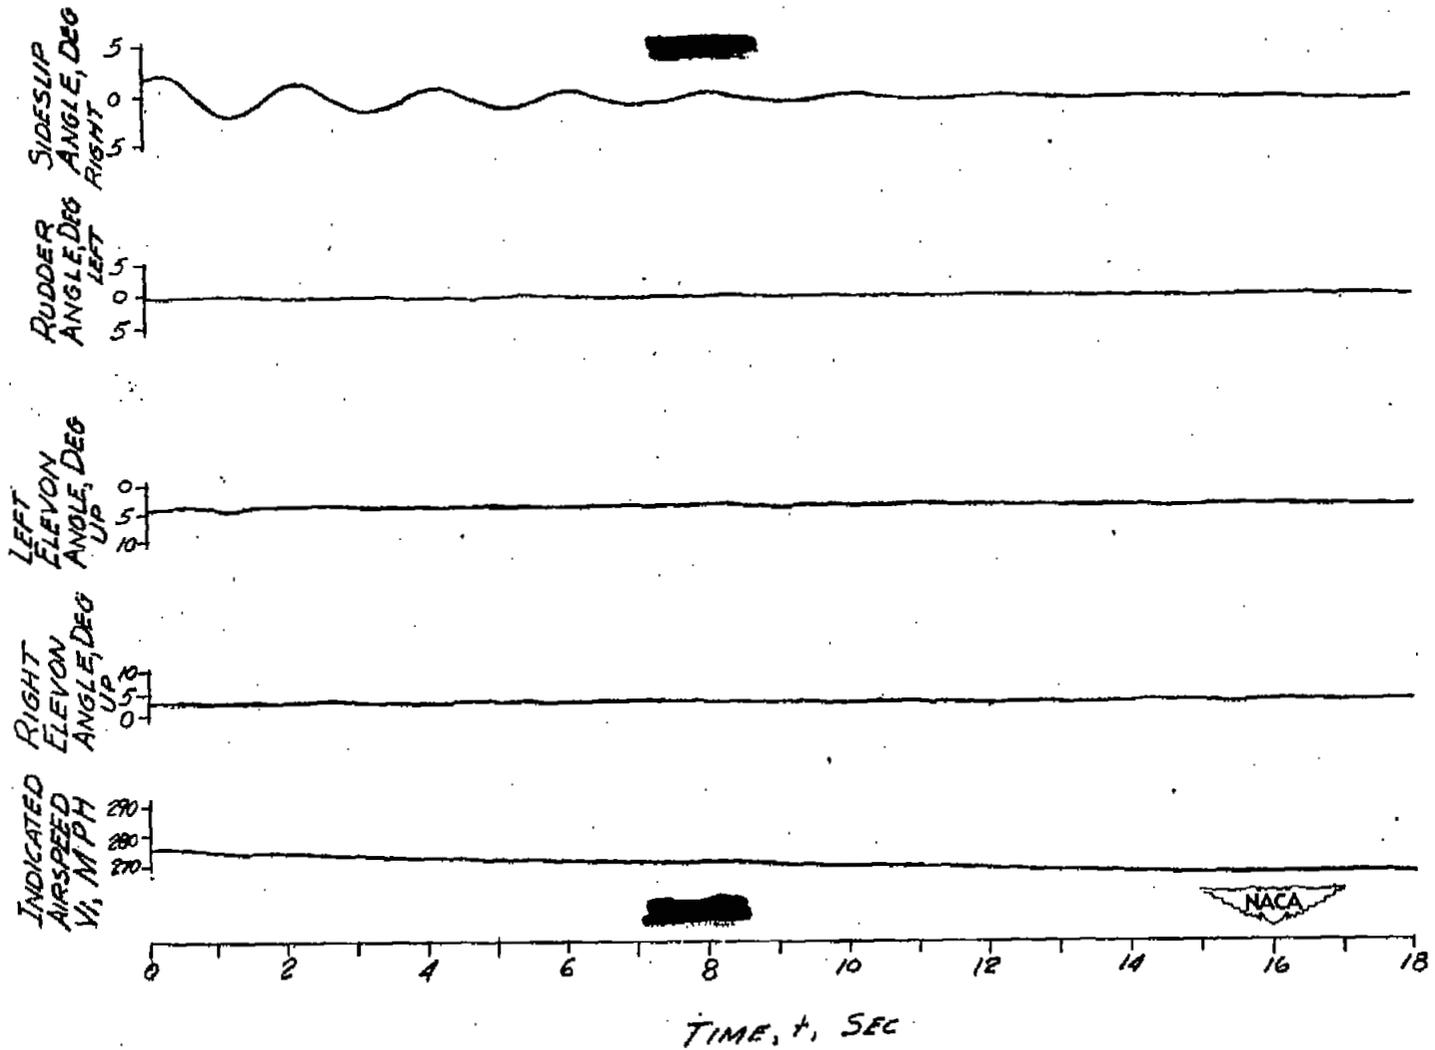


Figure 9.- Time history of elevon release in steady sideslip for X-4 airplane.

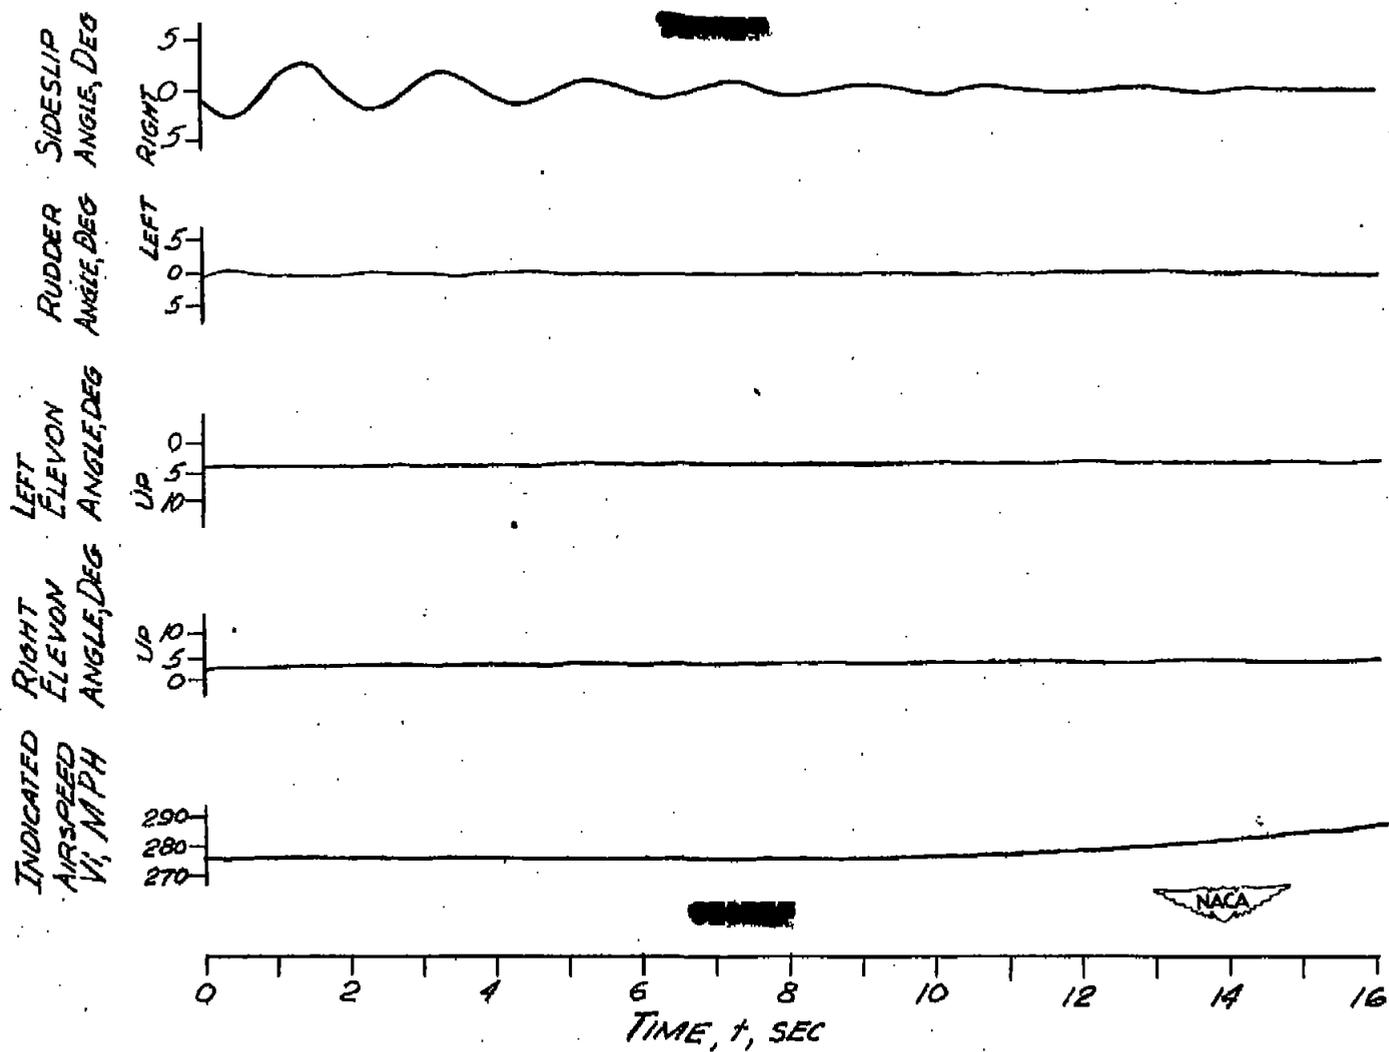


Figure 10.— Time history of rudder release in steady sideslip for X-4 airplane.

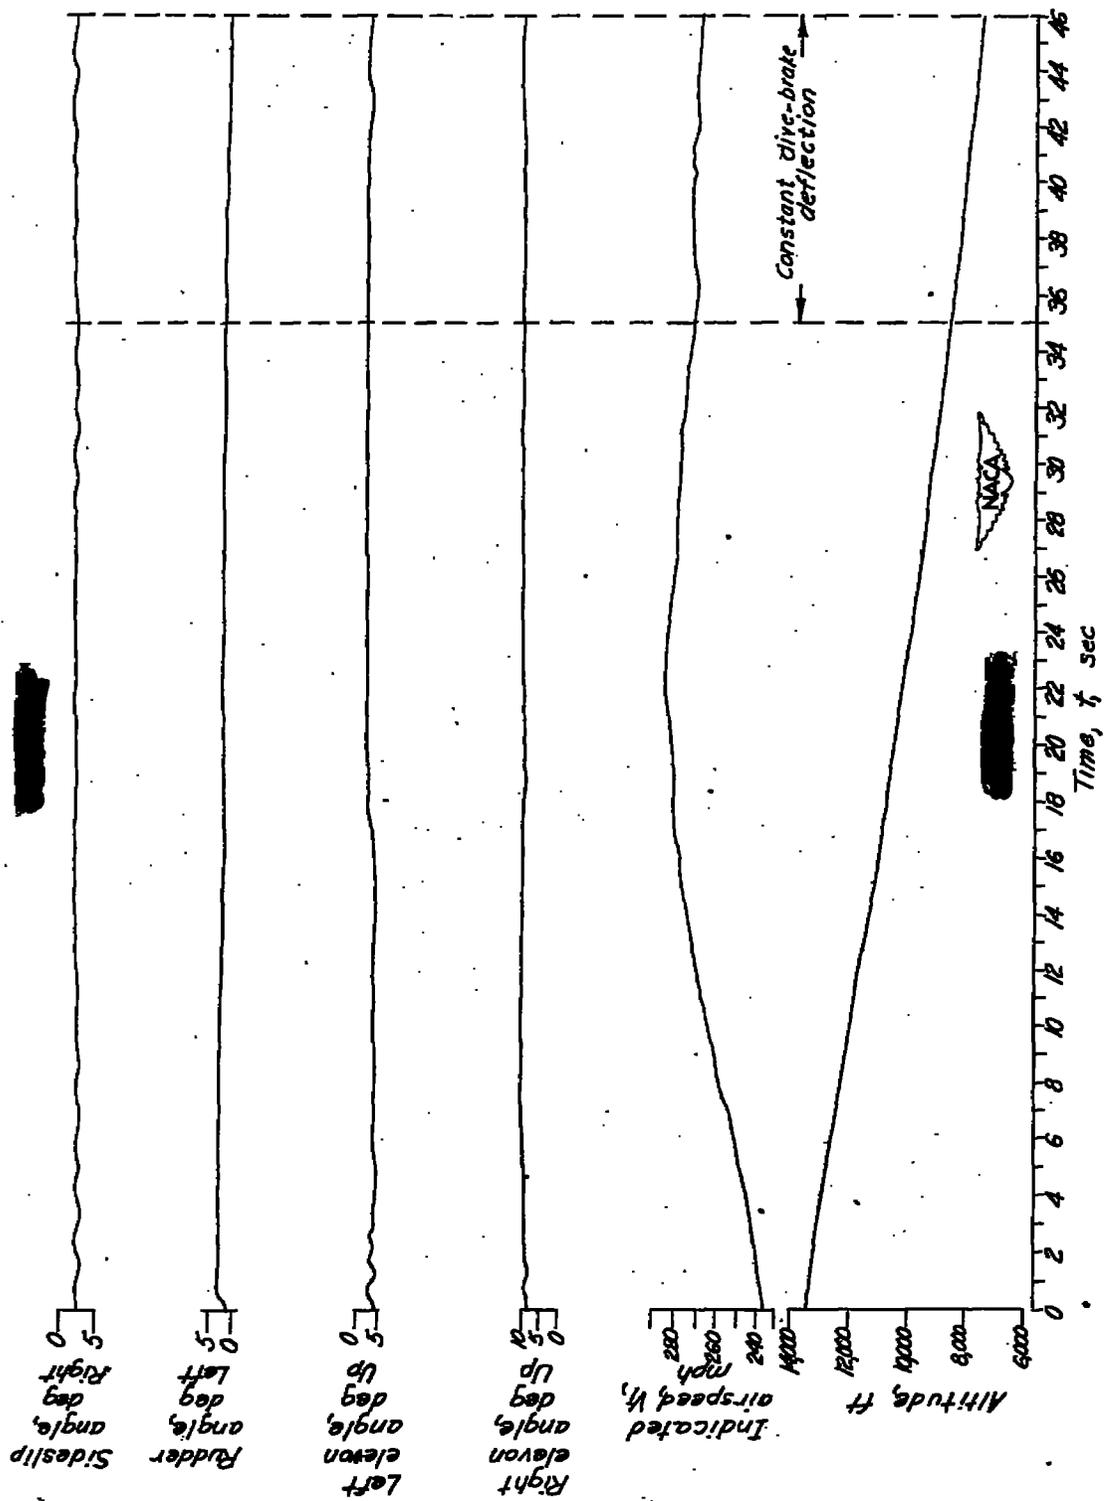


Figure 11.- Time history of descent with dive brakes open for X-4 airplane.

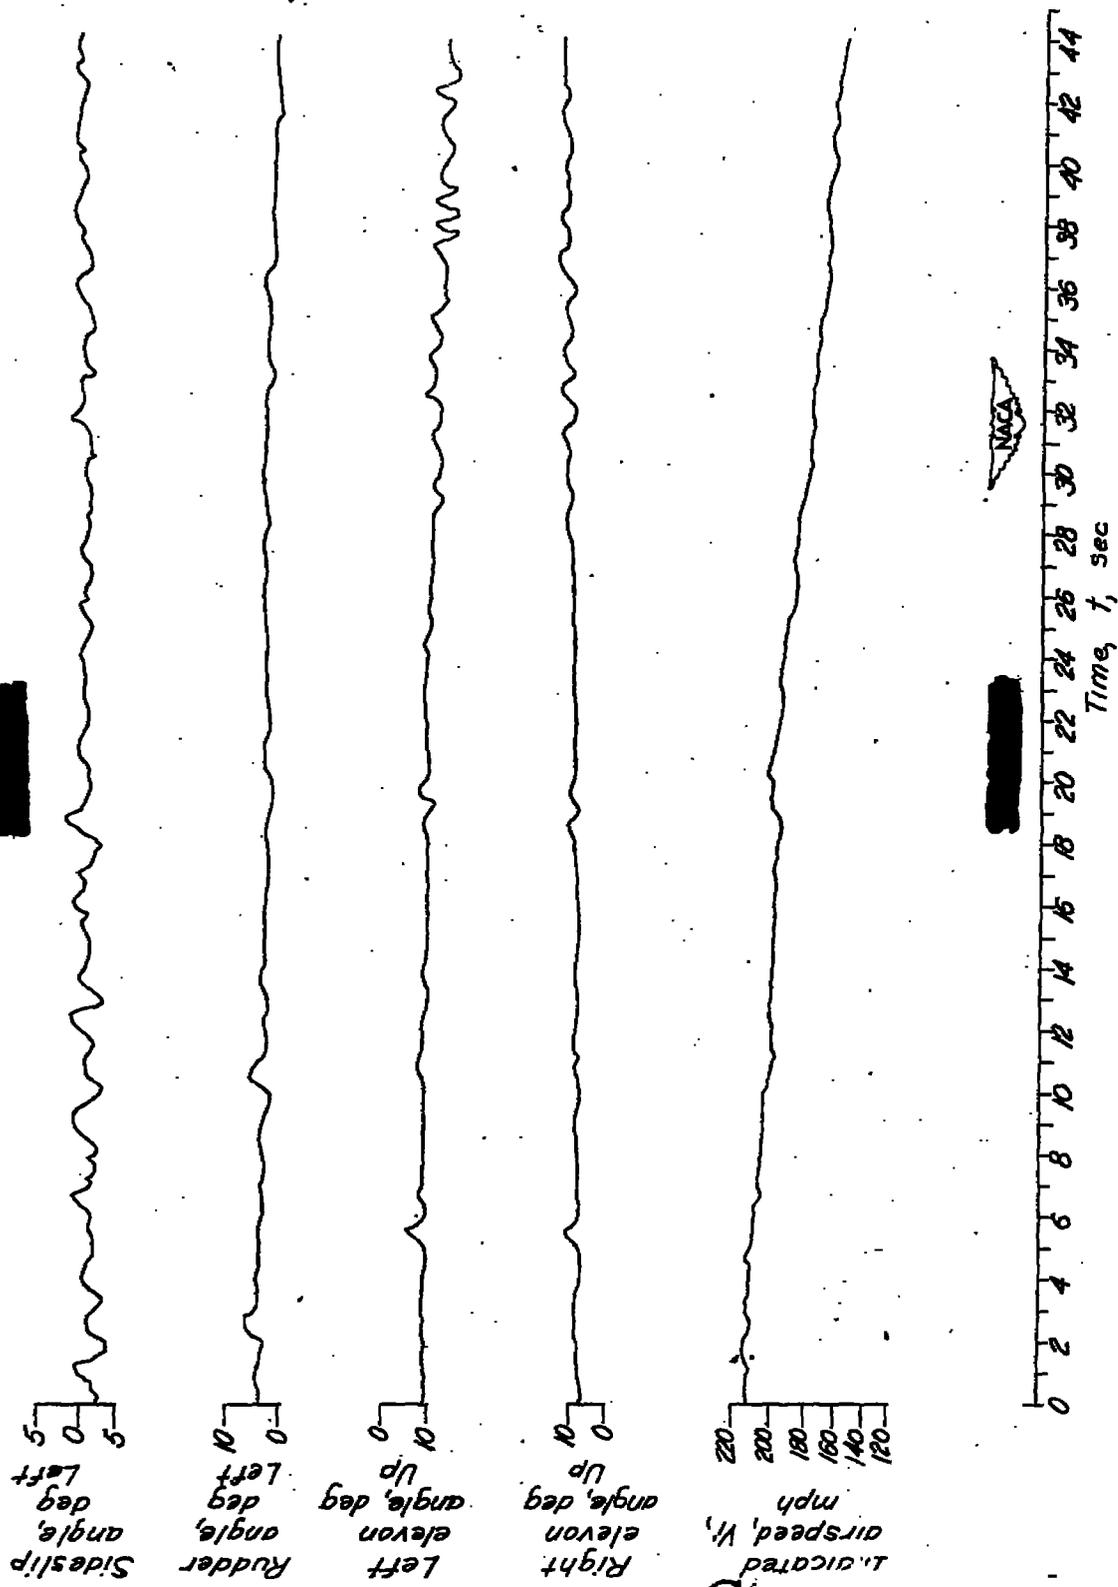


Figure 12.- Time history of landing for flight no. 4 for I-4 airplane.

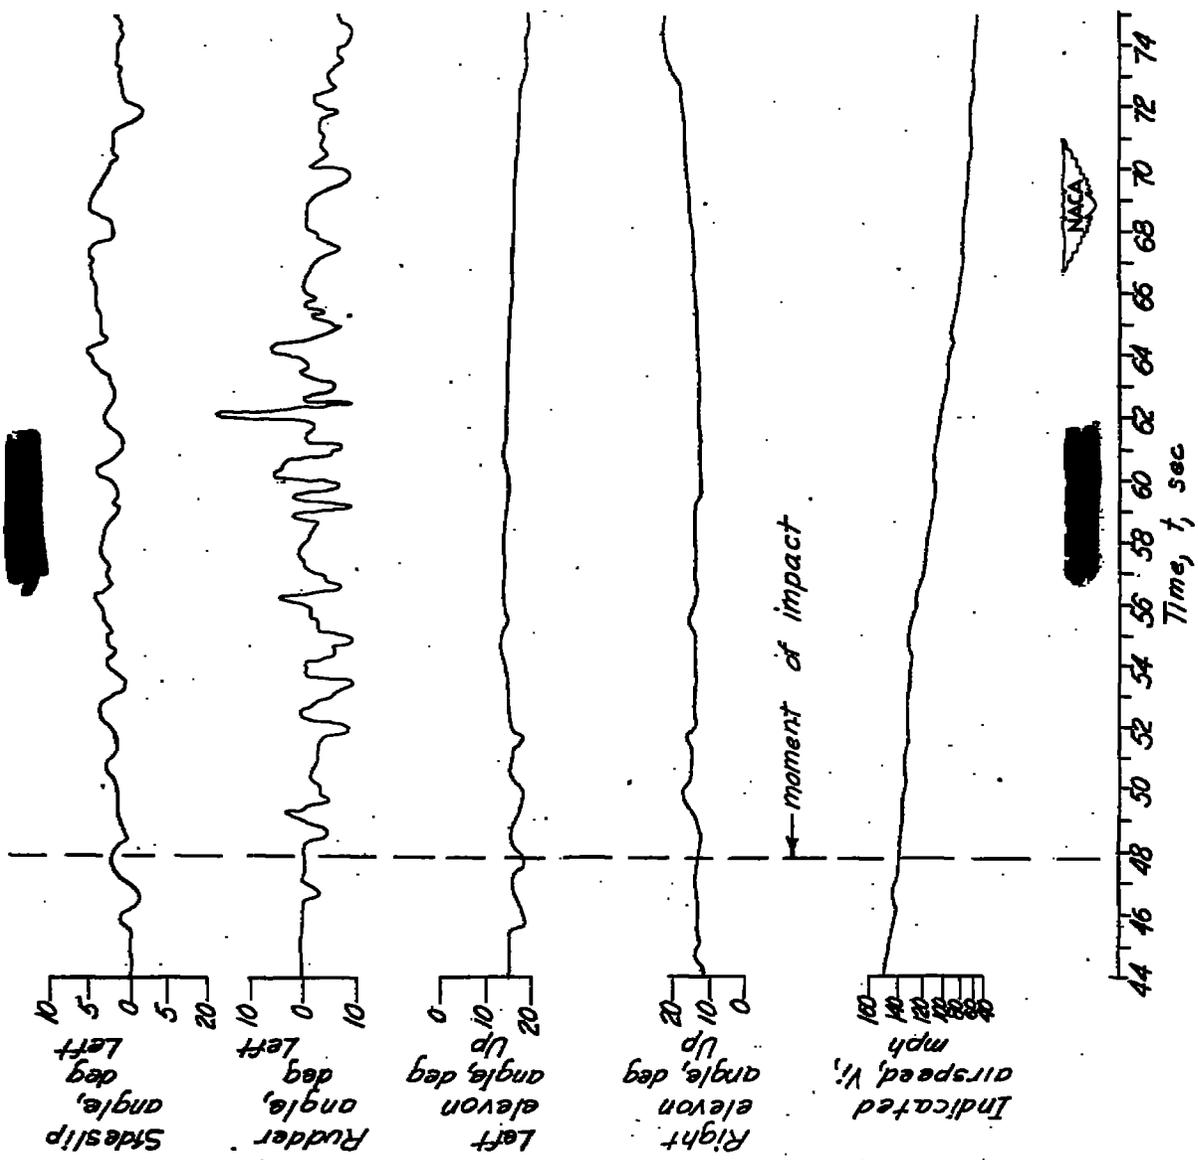


Figure 12.- Concluded.

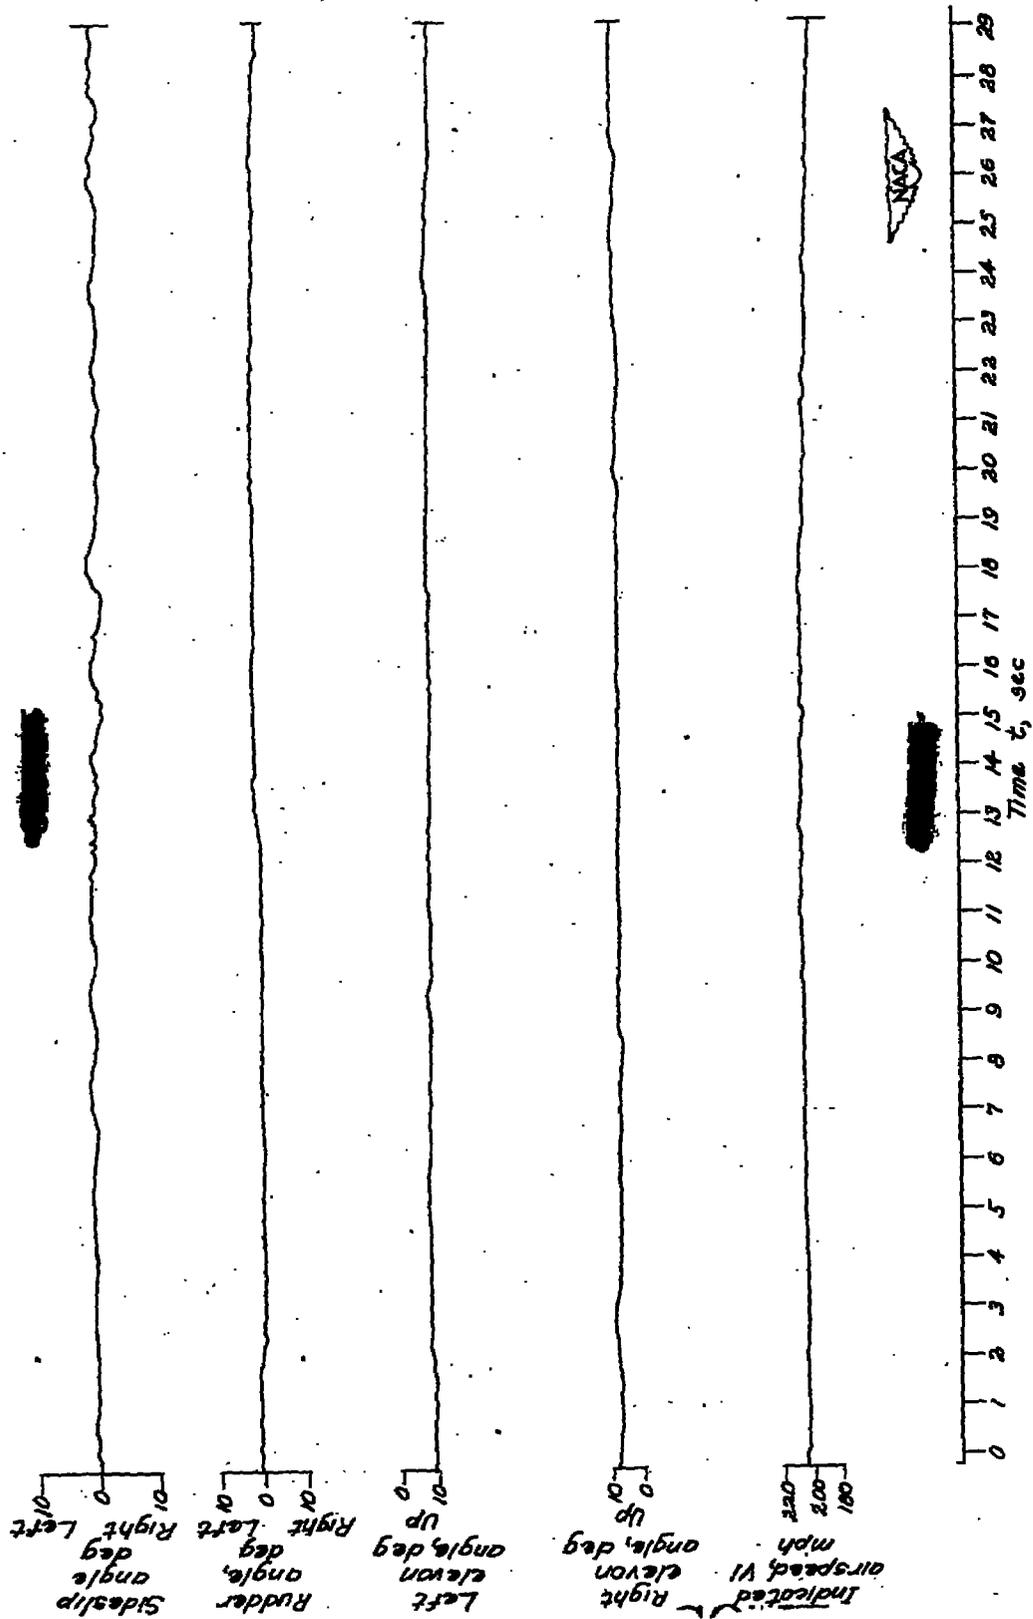


Figure 13.- Time history of landing for flight 5 for X-4 airplane.

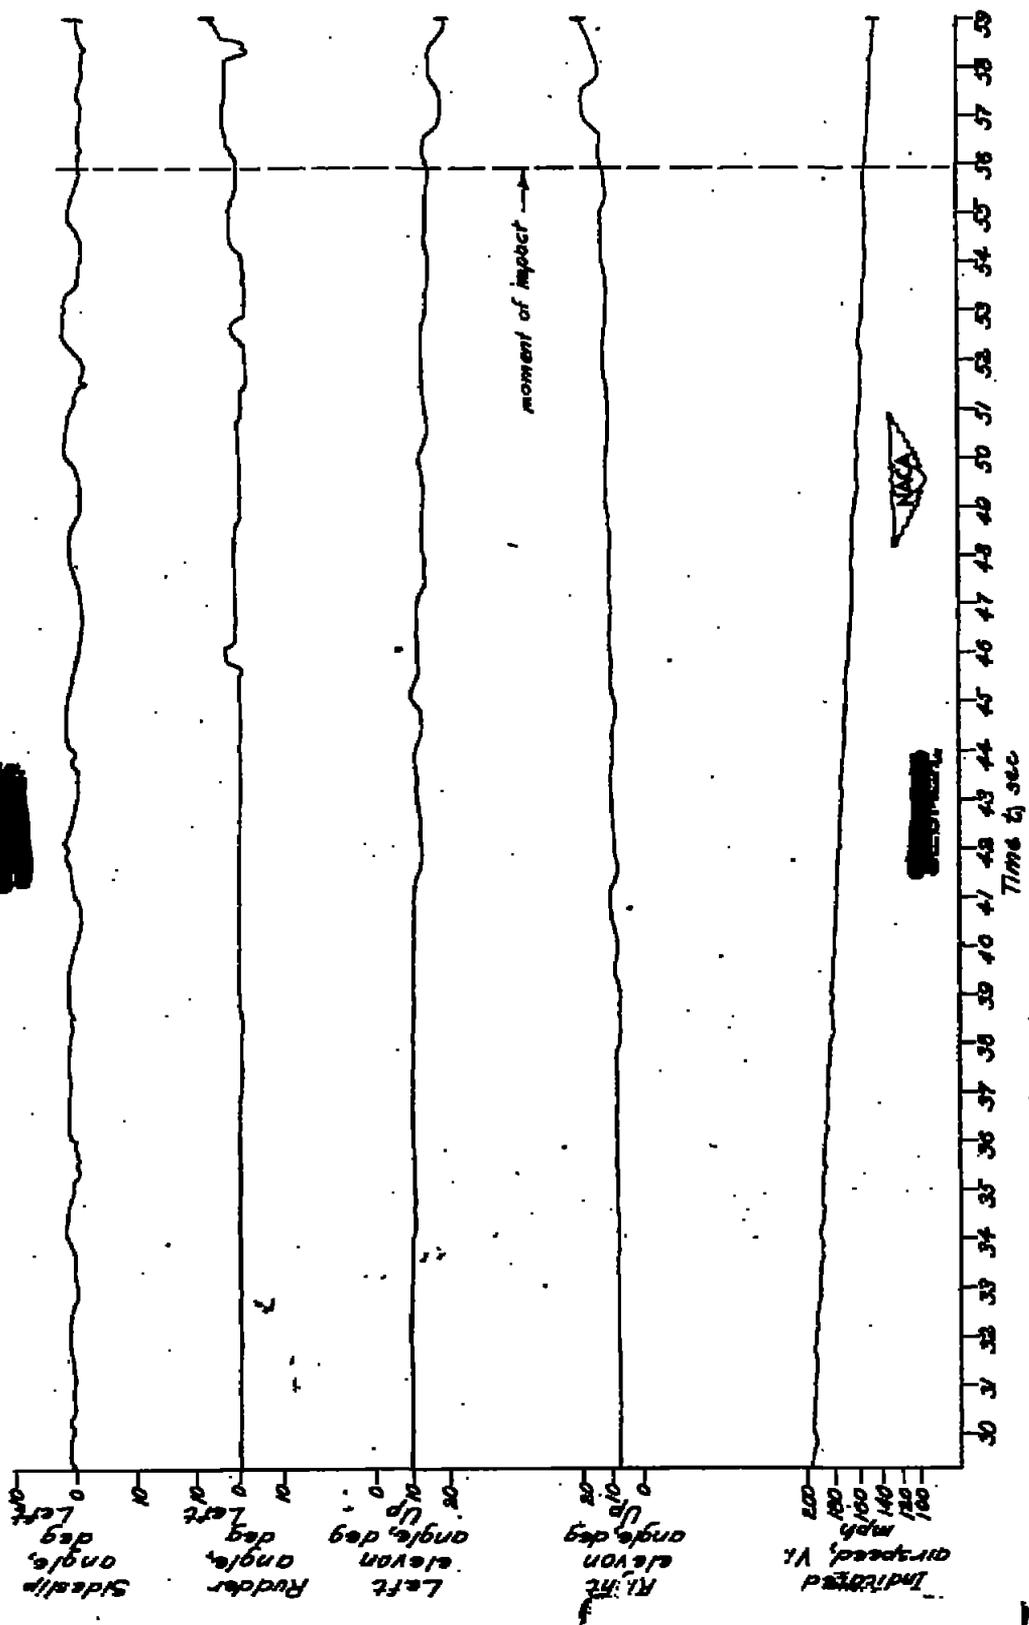


Figure 13.- Concluded.

INDEX

<u>Subject</u>	<u>Number</u>
Airplanes - Specific Types	1.7.1.2
Stability, Longitudinal - Static	1.8.1.1.1
Stability, Lateral - Static	1.8.1.1.2
Stability, Directional - Static	1.8.1.1.3
Flying Qualities	1.8.5

ABSTRACT

Results are presented from the fourth and fifth flights of the NACA instrumented Northrop X-4 semitailless research airplane.

Data presented from steady level runs from 140 to 340 miles per hour which showed the airplane to be longitudinally stable, stick fixed, in the clean configuration and in the gear-down flaps-retracted configuration.

Data also are presented from steady sideslip characteristics at 175 and 280 miles per hour which show that the directional stability is positive and high and lateral stability is positive.

NASA Technical Library



3 1176 01436 7693