[redacted]

Copy 231
RM E55C07

[redacted]

NACA RM E55C07

TECH LIBRARY KAFB, NM
0144029

# RESEARCH MEMORANDUM

## EXPERIMENTAL EVALUATION OF BORON-HYDROCARBON SLURRY IN A 16-INCH RAM-JET COMBUSTOR

By William R. Kerslake, E. E. Dangle, and A. J. Cervenka

Lewis Flight Propulsion Laboratory
Cleveland, Ohio

Classification cancelled (or changed to UNCLASSIFIED)
By Authority of NASA Tech Pub Announcement #7
(OFFICER AUTHORIZED TO CHANGE)
By ..... 14 Nov 58
NAME AND
GRADE OF OFFICER MAKING CHANGE)
30 Mar 61
DATE

CLASSIFIED DOCUMENT

This material contains information affecting the National Defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

June 1, 1955

6912

145

[redacted]

[redacted]

TECH LIBRARY KAFB, NM
0144029

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

# EXPERIMENTAL EVALUATION OF BORON-HYDROCARBON SLURRY IN A 16-INCH RAM-JET COMBUSTOR

By William R. Kerslake, E. E. Dangle, and A. J. Cervenka

3636

CJ-1

## SUMMARY

The combustion efficiency of a 50-percent-boron - hydrocarbon slurry was evaluated in a 16-inch ram-jet burner. A peak slurry combustion efficiency of 75 percent was usually obtained, and a value of 84 percent was once measured. The connected-pipe burner was run at a simulated flight condition of Mach number 2.85 at an altitude of 68,000 feet, with a 70-percent diffuser recovery giving a burner-inlet pressure of 1 atmosphere and temperature of 570° F.

Three different flame holders were tried, both with and without a fuel-air control sleeve. When air-atomizing slurry injectors were located upstream of the flame holder, maximum combustion efficiency was obtained at fuel-air equivalence ratios above 0.5. Placing the injectors inside the flame holder resulted in maximum combustion efficiency at equivalence ratios below 0.5.

## INTRODUCTION

It has been shown analytically (ref. 1) that the range of a supersonic ram-jet aircraft will be greatly increased by the use of high-energy fuels. Boron shows promise of increased aircraft range because of its high theoretical heat of combustion (ref. 2) and high fuel density. For a boron fuel to be useful in long-range flight applications, a high combustion efficiency must be obtained, since range is directly proportional to the heat output of the fuel.

A slurry of boron in a hydrocarbon fuel is desired because of its ease of injection into an engine compared with that of a solid fuel. The penalty of lower heating value of the hydrocarbon is partially compensated for, because the hydrocarbon fills up the voids in the powder and increases the fuel density. A 60-percent-boron - JP-4 fuel slurry would have a relative range equal to pure boron, according to the assumptions and calculations of reference 1 and the assumption that the pure

boron is carried as a powder with a density equal to 30 percent of the solid metal density. Slurry preparation techniques (ref. 3) have advanced so that 50- to 60-percent-boron slurries in JP-4 fuel can be successfully prepared.

Experimental burning of boron slurries is relatively recent, and results are not always consistent. Combustion efficiencies obtained by chemical analysis of combustion products from a 2-inch burner (ref. 4) were near 100 percent for the boron in a 30-percent slurry of boron in JP-3 fuel. Air specific impulse was measured in a 6-inch ram-jet burner for a 30-percent-boron slurry in heptane (ref. 5). The values of air specific impulse corresponded to a range of combustion efficiencies from 50 to over 100 percent of theoretical. When a 50-percent-boron slurry was burned in a 5-inch ram-jet burner (ref. 6), the combustion efficiency for the best combustor configuration investigated ranged from 47 percent at an equivalence ratio of 0.75 to 80 percent at an equivalence ratio of unity. The boron slurry gave a higher heat output than JP-4 fuel only when the fuel-air ratio was above stoichiometric for JP-4 fuel. In addition, the limits of stable combustion were not as wide for the slurry as for JP-4 fuel. 3636

For ram-jet cruise conditions, it is desirable to operate at lean fuel-air ratios. The requirement for high combustion efficiency at these lean ratios suggested burning the slurry at stoichiometric conditions with part of the inlet air and then mixing with the remainder of the air before exhausting. Since such a program was impracticable in a small burner, the 5-inch-burner experiments were extended to a 16-inch burner. Flame-holder geometry, fuel-injection points, and slurry concentration, as well as control of fuel-air mixtures, were varied in an effort to raise the level of the combustion efficiency to a value useful for long-range missile application.

## FUELS TESTED

The three varieties of boron slurry fuel prepared for this investigation are listed in table I. The electrolytic, 96-percent-pure boron was used only for a single data point. The method of preparation of the slurry followed that outlined in reference 3. It was necessary to use n-heptane as the carrier fuel to prepare the more concentrated slurries. Analysis of the boron powder is shown in table II.

In addition to being used as a carrier fuel for the slurry, JP-4 was burned as a pilot and auxiliary fuel in the engine. The n-heptane carrier fuel was 99 percent pure. The properties of JP-4 fuel are shown in table III.

3636

CJ-1 back

## APPARATUS

### Ram-Jet Engine

The 16-inch ram-jet engine (fig. 1) used in the investigation was composed of a subsonic annular diffuser, a water-cooled combustion chamber 16 inches in diameter, and a water-cooled variable-area exhaust plug. A centerbody terminated with a pilot at its downstream end.

The pilot combustion chamber was formed by extending the centerbody 8 inches. A single fuel nozzle supplied the pilot fuel, and 1.7 percent of the total engine air flow was scooped from the diffuser. The pilot fuel was ignited with a spark plug. The upstream end of the flame holder was attached to the pilot. The over-all length of the engine from the inlet of the diffuser to the nozzle outlet was 180 inches, 90 inches of which was the combustion chamber, measured from the start of the flame holder.

### Engine Installation

Installation of the ram-jet engine is shown in figure 2. The 16-inch engine received its air supply from the laboratory combustion air system and exhausted through a central ejector system. Air flow to the engine was controlled by a butterfly valve located upstream of the engine, while the pressure within the engine was controlled by a plug valve located at the engine outlet. Air flow to the engine was metered by an orifice in the supply line. The air was heated by means of a gas-fired heat exchanger and also by a combustor located directly in the air line. The air contained from zero to 13 percent combustion products as a result of the combustor in the line. The engine-outlet gases were cooled in a calorimeter, which consisted of a series of water spray nozzles located at the engine outlet and a thermocouple station 20 feet downstream where the resulting gas and steam temperatures were measured by 16 thermocouples located in equal areas across a 24-inch-diameter duct.

### Fuel Systems

Slurry. - The supply tank and injection system for the boron slurry fuel are shown in figure 2. The supply tank consisted of a cylinder in which a piston was mounted free to travel the full length of the cylinder. Up to 40 gallons of slurry fuel was contained below the piston; the pumping medium, ordinary jet fuel, was contained above the piston. The jet fuel flow was metered through a rotameter and then pumped into the tank to the top of the piston. The slurry fuel was forced from the tank through the injectors into the engine. The slurry flow was calculated from measurements of the jet fuel flow, the percentage solids, and the density of each slurry batch.

The slurry injectors, shown in figure 3(a), consisted of an inner tube that carried the slurry fuel surrounded by another tube carrying atomizing air. The outer tube was extended beyond the inner tube and was rolled inward. The rolled outlet orifice of the injector gave the atomizing air a radial component needed to help break up the slurry spray. Injectors of three different sizes were used during phases of the investigation. The inner diameters of the slurry-carrying tubes were 0.250, 0.188, or 0.116 inch. The total atomizing air of the injectors was less than 1 percent of the total engine air flow.

3636

Hydrocarbon. - JP-4 fuel was injected through four conical spray nozzles located 10 inches upstream of the flame holder. The nozzles were rated at 30 gallons per hour at a pressure differential of 100 pounds per square inch.

Control sleeve. - A 11.5-inch-diameter fuel-mixing control sleeve (ref. 7) was utilized for parts of this investigation. The sleeve intercepted approximately 20 percent of the total engine air flow and ducted this air into the upstream half of the combustion zone. The sleeve extended from the fuel injectors to the flame holders.

## Combustor Configurations

Six combustor configurations were used in this investigation. Configuration A (fig. 3(a)) consists of a can-type flame holder with 130 percent open area based on the combustion-chamber frontal area. A 5/8-inch annular area remained between the end of the can and the engine wall. The cold-flow pressure-drop coefficient for the combustor is 1.5, based on a measured static differential pressure across the flame holder converted to total pressure and on a dynamic pressure calculated from the engine air flow, static pressure, and combustor cross-sectional area. The six slurry and four jet fuel injectors are equally spaced 2 inches from the engine wall and 10 inches upstream of the start of the flame holder.

The can flame holder of configuration B (fig. 3(b)) is identical to that of configuration A. However, in this configuration a fuel control sleeve is included, and both the JP-4 fuel and the slurry injectors are located in the annulus formed between the control sleeve and the pilot centerbody wall. The injectors are equally spaced 3 inches from the engine wall and the same distance upstream of the flame holder as in configuration A.

Configuration C (fig. 3(c)) is similar to configuration B, except that the slurry injectors are outside the control sleeve 1 inch from the engine wall. Configuration D (fig. 3(d)) is also similar to configuration B, except that only the first four rings of holes in the can flame holder

are present. All the secondary air passes through the annular area between the engine wall and the end of the can flame holder. This modified can flame holder has an open area of 70 percent.

Configuration E is shown in figure 3(e). The can flame holder is the same as in configuration A. Six slurry injectors are positioned through a ring of holes in the can flame holder. Two alternate positions, the second or the fourth ring of holes, are used; the slurry injectors are located $4\frac{1}{4}$ inches from the engine wall or about $1\frac{1}{2}$ inches inside the can and are pointed either costream or contrastream as shown in the inset. The four JP-4 fuel-spray nozzles are 10 inches upstream of the flame holder and 2 inches from the engine wall.

3636

Configuration F (fig. 3(f)) consists of a sloping-baffle flame holder similar to one used in reference 8. The flame holder has 100 percent open area and a cold-flow pressure-drop coefficient of 2.0. The slurry is injected at either of two alternate positions, inside or outside the fuel-air control sleeve. JP-4 fuel is injected 10 inches upstream of the flame holder.

## PROCEDURE

The first attempts to burn slurry followed a conventional procedure of injecting slurry upstream of several types of flame holders. In an effort to improve the combustion efficiency, JP-4 fuel was burned in the first half of the flame holder to give a hotter temperature zone in which to burn the slurry. Finally, the slurry was injected inside the can flame holder. For comparison, JP-4 fuel was burned alone in the various configurations.

### Operating Conditions

Most of the ram-jet combustion runs were made at the following average operating conditions:

| | |
|---|---|
| Inlet-air temperature, °F | 570 |
| Inlet-air pressure, in. Hg abs | 30.0 |
| Inlet-air velocity based on maximum cross-sectional area of combustion chamber, ft/sec | 235 |
| Inlet-air weight flow, lb/sec | 12.7 |

These inlet conditions simulated a flight speed of Mach number 2.85 at a 68,000-foot altitude with a 70-percent diffuser pressure recovery.

### Combustion Efficiency

Outlet enthalpy of the combustor exhaust gases was determined from a heat-balance system as descr[redacted]ference 9. The combustion

efficiency was obtained from the ratio of the enthalpy rise of fuel, air, quench water, and engine cooling water to the heating value of the total fuel input. The heating value of the slurry was calculated from the percentage solids in the slurry, the purity of the boron powder times 25,400 Btu per pound, and the lower heating value of JP-4 fuel (18,675 Btu/lb). A lower heating value of 19,157 Btu per pound was used for the n-heptane. The upper heating value of boron was used, because it was assumed that any oxide vapors would condense to solid oxide in the water quench of the calorimeter.

At a given engine operating condition, the quench-water flow was adjusted to a value ensuring quenching of the combustion products and complete vaporization of the water. Mixture temperatures of 700° to 1000° F were maintained at the thermocouple station. Negligible heat loss from the insulated ducting downstream of the water spray was assumed.

3636

## Over-All Equivalence Ratio

Over-all equivalence ratio is defined as the ratio of measured to stoichiometric fuel-air ratio. The stoichiometric fuel-air ratio was calculated from individual stoichiometric fuel-air ratios of 0.0680 for JP-4 fuel, 0.0658 for n-heptane, and 0.1044 for pure boron (0.1160 for 90-percent-pure boron). The over-all equivalence ratio was raised to correct for the vitiated air by adding the amount of fuel burned in the preheater.

## Slurry-Spray Sampling

At simulated engine conditions. - Photomicrographs were taken of a spray of 50-percent boron slurry injected through a 0.116-inch air-atomizing injector (fig. 3(a)). The slurry was sprayed in the center of an 8-inch-diameter duct 10 inches upstream of a window. The air velocity was 220 feet per second at 575° F and atmospheric pressure. Photographs were taken through the window with a 4-microsecond flash and rotating mirror to stop the motion (ref. 10).

In open air. - A 0.188-inch slurry injector was used to spray 50-percent-boron slurry into still air. The velocity of the atomizing air was sufficient to carry the spray away from the injector. A sheet of paper 18 inches from the injector was momentarily exposed to the spray. The deposits were magnified and photographed.

In engine. - Slurry spray in the engine was momentarily allowed to impinge on a collodium-covered electron microscope grid. The grid was on a probe positioned in line with and 7 inches downstream of a slurry injector in configuration C.

3636

## RESULTS

### Combustor Configurations

Can combustor. - The combustion efficiencies obtained with configuration A are plotted in figure 4(a). The slurry was injected either costream or contrastream, giving peak efficiencies of 69 and 65 percent, respectively, at an equivalence ratio of 0.8. The two curves were within experimental error of each other. Run 1 was made at slightly higher air pressure, because the altitude exhaust system was inoperable. The JP-4 fuel efficiency was much higher than that of the slurry, the peak efficiency being 88 percent at an equivalence ratio of 0.5. The rich end of the curve was the limit of the JP-4 fuel system.

Can combustor with control sleeve. - Peak combustion efficiencies for configuration B (fig. 4(b)) were obtained at an equivalence ratio of about 0.5. The air flow through the inside of the sleeve was 20 percent of the total air flow. The smaller slurry injectors gave higher efficiencies for run 5 (84 percent) than for run 4 (76 percent). Lowering the inlet-air pressure resulted in a lower efficiency, as seen by comparing runs 5 and 6. Boron of 96-percent purity was used for run 7, which was made at conditions comparable with those of run 5. The slurry for run 7 was more viscous than usual, and the slurry injectors plugged after the first point was taken.

Run 8 is the result of combining JP-4 fuel points obtained before each of several slurry runs. The scatter of points is typical data error due to instrumentation inaccuracy. Any particular curve determined at one time might have less scatter because of a uniform error.

Can with intense pilot. - Combustion efficiencies obtained with configuration C are plotted in figure 4(c). The combination of normal pilot plus additional JP-4 fuel in the first half of the flame holder (primary zone) is defined as the intense pilot. When a slurry of 65-percent boron in n-heptane was injected outside the sleeve (secondary zone) and JP-4 fuel inside the sleeve, an over-all efficiency peak of 77 percent was obtained at an equivalence ratio of 0.9 (run 9). Run 10, with less JP-4 fuel inside the sleeve, had lower combustion efficiencies. JP-4 fuel injected alone inside the sleeve gave 85 to 90 percent combustion efficiency in run 8 (fig. 4(b)). Comparison of runs 9 and 11 shows that the effect of using vitiated air is small.

Modified can combustor with control sleeve. - The level of combustion efficiency of the modified can (configuration D, fig. 4(d)) was equivalent to that of the unmodified can (fig. 4(b)). Higher efficiency was obtained with smaller injectors. The residence time of a particle in the combustion chamber was increased 30 percent by decreasing the air velocity (run 14). The trend of run 14 is doubtful, because injector plugging occurred after the first point was taken. The JP-4 fuel efficiency was again higher than the slurry efficiency.

Can with internal injection. - Figure 4(e) shows combustion efficiencies obtained with configuration E. If it is assumed that the JP-4 fuel burns with higher efficiency than the boron, the highest boron efficiencies resulted when the slurry was injected contrastream at the fourth row of holes. Injecting costream at the second row resulted in a lower efficiency. Additional JP-4 fuel upstream of the flame holder gave no significant improvement in efficiency, while JP-4 fuel alone again burned with higher efficiency than slurry.

Sloping-baffle combustor. - Combustion efficiencies for configuration F are presented in figure 4(f). A 50-percent-boron - JP-4 fuel slurry injected into the primary zone gave lower efficiencies (run 20) than were obtained with the can combustor (run 4). Injecting slurry into the secondary zone and JP-4 fuel into the primary zone (run 21) resulted in the best efficiency for the intense pilot scheme (normal pilot plus JP-4 fuel inside the sleeve). The addition of JP-4 fuel, however, lowered the boron percentage of the total fuel to 38 percent at the rich end and 23 percent at the lean end of run 21. The more efficient burning of JP-4 fuel is again noted by comparing run 21 with run 22, in which less JP-4 fuel was added in the primary zone.

3636

## Slurry Atomization

The average diameter of the prime boron particles was 1 micron, but the spray produced larger groups or clusters of prime particles. These groups varied in size up to 200 microns. Figure 5(a) is a photomicrograph of a 50-percent-boron slurry spray taken with the 4-microsecond flash and a rotating mirror (ref. 10). A range of 5- to 100-micron particles can be seen. The greatest number of particles are 30 microns in diameter. The technique does not show particles smaller than 5 microns. Figure 5(b) shows a photomicrograph of 50-percent boron in JP-4 fuel sprayed through a 0.188-inch injector into open air. The sample was collected on a piece of paper 18 inches from the injector.

The slurry spray pattern was subject to errors because of the absence of a heated airstream passing over the injector, as occurs in the engine. In addition, there is the possibility that a large drop might be the result of several smaller drops striking the same spot on the paper.

The sampling attempt using the electron microscope grid failed to produce quantitative results, because the hot airstream destroyed the collodium film. Observation of fragments of remaining collodium film indicated the particle size range to be 1 to 100 microns. The 1-micron particles were similar to those in electron micrographs of the original boron powder (ref. 3).

The slurry spray was believed to be formed in a manner similar to an ordinary liquid spray, but the hydrocarbon quickly evaporated in the 575° F airstream, leaving clusters of boron powder. The size of these clusters was assumed to be proportional to the original slurry spray droplets. The hydrocarbon evaporated at a rate such that the slurry spray was a dry dust 7 inches downstream of the injector.

## Engine Deposits

The following table is an analysis of chips of deposits formed on the flame holder and exhaust plug during run 4:

| Source of sample | Boron, percent | | Unburned solid carbon, percent |
|---|---|---|---|
| | Burned | Unburned (solid) | |
| Flame holder | 58 | 31 | 11 |
| Exhaust plug | 50 | 49 | 1 |

Figure 6(a) is a photograph of the can combustor after run 4, in which slurry was burned for 15 minutes. Figures 6(b) and (c) are photographs of the can combustor after a run in which slurry was internally injected for 12 minutes. The lack of deposits in the lower left portion in figure 6(b) resulted from a plugged slurry injector located in that sector. Figure 6(d) is a photograph of the sloping-baffle combustor after a run similar to run 22. The run data were not reported, because slurry injector plugging occurred.

Deposits also collected on the exhaust plug and in the pilot. These deposits varied from 1/8 inch to several inches, depending upon the run. The amount of deposits was not known until the combustor was cleaned for the next run. No change was noted in the combustion efficiency of JP-4 fuel before and after the slurry had deposited up to 1/8 inch on the flame holder. Thicker deposits on the flame holder shifted the combustion efficiency with JP-4 fuel in an unpredictable manner.

## Flame-Holder Burn-Out

Minor flame-holder burn-outs (1 to 3 sq in. of metal) occurred in approximately half the total number of runs. Burn-outs of 10 to 15 square inches of metal occurred during run 4 (fig. 6(a)), run 13 (modified can), and run 21 (sloping baffle). The severity of the burn-out was usually greater for runs with higher combustion efficiency. The average life of a flame holder was increased by increasing the thickness of the material from 3/32 to 3/16 inch.



3636

CJ-2

## DISCUSSION

### Slurry Atomization

Although fuel distribution and flame-holder geometry were the principal variables, a discussion of slurry atomization is included first because of its possible great effect on combustor efficiency. The combustion of boron is probably a surface-phase reaction, as evidenced by boron vapor pressure (ref. 11). As shown in the following table, the vapor pressure is extremely small at 3300° R, which is the theoretical flame temperature that would be obtained if only the hydrocarbon of the slurry burned in a stoichiometric mixture of 50-percent-boron slurry and air:

| Temperature, °R | Boron vapor pressure, mm Hg |
|---|---|
| 3300 | [a]0.01 |
| 3600 | .25 |
| 4320 | 24.6 |
| 4680 | 138 |
| 5080 | 760 |

[a]Extrapolated.

If the combustion process is a surface-phase reaction, the rate of burning of the boron particle will be directly proportional to its surface area, and the time to burn one particle of boron will be proportional to its size. The results of spraying slurry into a heated airstream indicate that part, if not all, of the clusters are unbroken before reaching the flame holder.

The 100-micron clusters of boron particles might also pass through the combustor and never burn any appreciable amount because of their reduced surface area. If these clusters are the cause of low combustion efficiency, the results could be interpreted as follows:

(1) Smaller slurry injectors gave better efficiency because of increased atomization, shown by runs 4 and 5 (fig. 4(b)) and runs 12 and 13 (fig. 4(d)).

(2) Most of the atomization was accomplished in the injector tip, because there was no increase in efficiency by pointing the injectors contrastream as in run 2 (fig. 4(a)).

## Combustor Configurations and Fuel

The peak in a combustion-efficiency curve can be shifted by controlling fuel-air mixtures. Configuration A had no control sleeve; consequently, its peak occurred (fig. 4(a)) at a richer equivalence ratio than that of any other configuration. This maximum equivalence ratio was 0.8 instead of 1.0 as might be expected (ref. 6) because of air flow through the annular area between the end of the can and the 16-inch-diameter burner wall.

3636

To keep the combustion efficiency high at lean fuel-air mixtures, the slurry was burned at stoichiometric conditions with part of the inlet air and then mixed with the remainder of the air before exhausting. Injecting the slurry inside a control sleeve (configuration B) produced a richer local fuel-air mixture and thereby shifted the peak to about 0.5 equivalence ratio. The combustor efficiency level remained low (70 to 75 percent).

Another attempt was made to control the fuel-air mixing in the combustor by injecting the slurry inside the flame holder. When the slurry was introduced progressively toward the upstream end of the can, the peak combustion efficiency was shifted toward small equivalence ratios, because less air was available locally for combustion. The leanest peaks were obtained with runs 16 and 19 (fig. 4(e)), in which all the slurry was sprayed contrastream. Contrastream injection is similar to using a control sleeve, because it concentrates the fuel in the first part of the can; while costream injection spreads out the fuel as when no control sleeve is used. The addition of JP-4 fuel with no control sleeve also shifted the peak higher toward an equivalence ratio of 0.8 (fig. 4(a)). The shifting of the peaks suggests a combination of injection positions to obtain broad fuel-air operation at maximum combustion efficiency.

In an effort to raise the level of combustion efficiency, the modified-can and sloping-baffle combustors were tried. The new designs provided for additional burning time at a high local temperature before the diluent air was mixed with the reaction mixture. It was thought that the reaction might not be complete when mixed with diluent air and that the cooling would quench the reaction. The combustion-efficiency level was slightly raised with the modified can, but slightly lowered (run 21, fig. 4(f)) with the sloping-baffle combustor.

Another attempt to raise the level of combustion efficiency was the introduction of a larger, more intense pilot. It was thought that the boron particles might burn better if boosted to a hotter temperature with the larger piloting zone. The additional JP-4 fuel needed for the pilot, however, reduced the percentage of boron in the total fuel. To keep the boron percentage high, a more concentrated slurry was made with n-heptane as the carrier. The runs with larger additions of JP-4 fuel (run 9, fig. 4(c) and run 22, fig. 4(f)) were more efficient for two possible reasons:

(1) The greater percentage of the total fuel was hydrocarbon, which burned more efficiently than the slurry, or (2) the combustion of boron itself actually increased, assuming a constant efficiency for the hydrocarbon.

All the combustion-efficiency data are the result of burning a mixture of solid boron and hydrocarbons. To establish how efficiently each is burning would necessitate an analysis of the exhaust products. The analysis was not made, but JP-4 fuel was burned alone in the various combustors, with a resulting higher efficiency. If it is assumed that the hydrocarbon burns with the same efficiency at the same equivalence ratio in the presence of boron particles, then the efficiency of the boron is much lower than that for the slurry.

3636

## Low Combustion Efficiency of Boron

The apparently low combustion efficiency of boron might be caused by any one or a combination of the following phenomena:

(1) Low burning rate of boron due to chemical inertness. Samples of the boron powder were analyzed and were found to contain from 8 to 15 percent hydrogen-peroxide-insoluble boron of the 90-percent free boron in the powder. Presumably, the peroxide-insoluble boron would be more difficult to burn. Burning rate or reactivity might be increased by new techniques that produce either a different crystal structure or a reduction of chemical impurities or contaminants.

(2) Condensation of boron oxide $B_2O_3$ on the surface of unburned boron particles.

(3) Low reactivity of boron compared with a fuel such as a hydrocarbon or even magnesium that can vaporize and burn as a gas rather than as a solid.

(4) Inadequate fuel atomization. Large particles (100 microns) consisting of clusters of boron particles were produced by the fuel injector. The burning time of a liquid fuel droplet is proportional to the square of the diameter. For example, a 100-micron drop of liquid fuel would require 10,000 times longer to burn than a 1-micron drop. The clusters might be present in the bulk slurry or be produced by the injector process, but it is not known whether they break up while passing through the flame zone. Improved injection methods or better slurry additives might promote complete break-up of the clusters before or during the combustion process.

(5) Poor burner design. Most burners or flame holders for boron are designed similarly to those for burning an easily vaporized liquid fuel. Perhaps more turbulence is necessary to mix the solid boron particles with unburned oxygen.

(6) Askew fuel patterns caused by injector plugging. Sections where plugging occurred were fuel-starved, while the remaining injectors were overloaded with slurry, resulting in poorer atomization and fuel-rich sections.

(7) Dissociation of $CO_2$ to CO. Any heat of dissociation is not recovered in the calorimeter if the exhaust products are frozen by the quench-water spray. A chemical analysis would be necessary to determine whether reassociation occurs. The dissociation error could amount to a 10-percent decrease in the measured combustion efficiency (ref. 6) for operation at stoichiometric fuel-air ratio. The error drops to less than 1 percent decrease for equilibrium operation at an equivalence ratio of 0.7.

3636

(8) Deposits on the flame holder. Deposits can cause a decrease or an increase in combustion efficiency, depending on whether they produce a poorer or a better flow recirculation in the flame holder.

## SUMMARY OF RESULTS AND CONCLUSIONS

In an evaluation of a boron-hydrocarbon slurry in a 16-inch ram-jet burner at a simulated flight condition of Mach 2.85 at 68,000 feet the following results were obtained:

1. Most of the combustion efficiencies of 50-percent boron in JP-4 fuel fell in a range of 60 to 75 percent of the theoretical combustion efficiencies.

2. A peak efficiency of 84 percent was obtained with a can combustor with a fuel-air control sleeve.

3. The same number of smaller slurry injectors produced better combustion efficiencies than larger injectors for equivalent conditions.

4. A lower combustion pressure resulted in a lowering of the combustion efficiency.

5. Internal injection of the slurry shifted the peak in combustion efficiency to a lower equivalence ratio without changing the level of the peak.

Boron has theoretical potential value as a ram-jet fuel because of its large heat of combustion, high density, and high air specific impulse. It also offers stable storage and nontoxic properties. The full potential heat output of boron has not been realized. Part of the loss is due to use of impure (90 percent) boron, and part is due to low combustion efficiency. Work should be continued on a small scale to define the exact

nature of the low combustion efficiency. If the full heat output is not achieved, the nuisance problems of injector plugging, flame-holder burn-out, and deposit formation need not be solved.

Lewis Flight Propulsion Laboratory
National Advisory Committee for Aeronautics
Cleveland, Ohio, March 9, 1955

3636

## REFERENCES


1. Henneberry, Hugh M.: Effect of Fuel Density and Heating Value on Ram-Jet Airplane Range. NACA RM E51L21, 1952.

2. Breitwieser, Roland, Gordon, Sanford, and Gammon, Benson: Summary Report on Analytical Evaluation of Air and Fuel Specific-Impulse Characteristics of Several Nonhydrocarbon Jet-Engine Fuels. NACA RM E52L08, 1953.

3. Goodman, Irving A., and Fenn, Virginia O.: Preparation and Properties of Concentrated Boron-Hydrocarbon Slurry Fuels. NACA RM E54F18a, 1954.

4. Lord, Albert M.: An Experimental Investigation of Combustion Properties of a Hydrocarbon Fuel and Several Magnesium and Boron Slurries. NACA RM E52B01, 1952.

5. Garmon, R. C., Longo, A., and Wolf, R. L.: Combustion of Boron. Final Rep., Experiment, Inc., Nov. 1, 1953.

6. Reynolds, Thaine W., and Haas, Donald P.: Performance of Slurries of 50-Percent Boron in JP-4 Fuel in 5-Inch Ram-Jet Burner. NACA RM E54D07, 1954.

7. Cervenka, A. J., and Dangle, E. E.: Effect of Fuel-Air Distribution on Performance of a 16-Inch Ram-Jet Engine. NACA RM E52D08, 1952.

8. Cervenka, A. J., Bahr, D. W., and Dangle, E. E.: Effect of Fuel-Air Ratio Concentration in Combustion Zone on Combustion Performance of a 16-Inch Ram-Jet Engine. NACA RM E53B19, 1953.

9. Cervenka, A. J., and Miller, R. C.: Effect of Inlet-Air Parameters on Combustion Limit and Flame Length in 8-Inch-Diameter Ram-Jet Combustion Chamber. NACA RM E8C09, 1948.

10. Ingebo, Robert D.: Vaporization Rates and Drag Coefficients for Isooctane Sprays in Turbulent Air Streams. NACA TN 3265, 1954.

11. Luft, N. W.: The Thermodynamic Properties of some Metals and their Oxides at High Temperatures. Tech. Memo. No. 14/M/48, Explosives Res. & Dev. Establishment, Ministry of Supply, Sept. 1948.

3636

TABLE I. - ANALYSIS OF BORON SLURRY FUELS

| | 50-Percent boron (90 percent pure) in JP-4 | 65-Percent boron (90 percent pure) in n-heptane | 50-Percent boron (96 percent pure) in JP-4 |
|---|---|---|---|
| Boron powder, percent | 50.7 | 63.4 | 53.2 |
| Carrier fuel, percent | 47.5 | 35.1 | 45.0 |
| Wetting agent (glycerol sorbitan laurate), percent | 1.6 | 1.5 | 1.3 |
| Thickening agent (aluminum octoate), percent | .2 | ---- | .5 |
| Density, lb/cu ft | 74.3 | 79.5 | 76.7 |
| Lower heating value, Btu/lb | 20,600 | 21,400 | 21,600 |

3636

TABLE II. - ANALYSIS OF BORON POWDER

| | 90-Percent-pure boron | 96-Percent-pure boron |
|---|---|---|
| Method of production | Magnesio-thermic reduction | Electrolytic |
| $H_2O$ soluble boron, percent | 0.0-0.5 | 0.56 |
| Weight loss at 105° C, percent | 0.0-0.5 | 0 |
| Free boron, percent | 89.0-90.2 | 96.3 |
| Acidity[a] of water extract, pH | 5.4-6.0 | ---- |
| Average particle size, microns | 1 | 1 |

[a]The analytical procedure used for determining the pH is outlined in reference 3.

TABLE III. - SPECIFICATIONS AND ANALYSIS OF MIL-F-5624A,

GRADE JP-4, ENGINE FUEL

| | Specifications | Analysis |
|---|---|---|
| A.S.T.M. distillation D 86-46, °F: | | |
| Initial boiling point | | 140 |
| Percentage evaporated: | | |
| 5 | | 199 |
| 10 | 250 (max.) | 224 |
| 20 | | 250 |
| 30 | | 270 |
| 40 | | 290 |
| 50 | | 305 |
| 60 | | 325 |
| 70 | | 352 |
| 80 | | 384 |
| 90 | | 427 |
| Final boiling point | 550 (max.) | 487 |
| Residue, percent | 1.5 (max.) | 1.2 |
| Loss, percent | 1.5 (max.) | 0 |
| Specific gravity, °A.P.I. | 40° (min.), 58° (max.) | 53.5° |
| Reid vapor pressure, lb/sq in. | 2.0 (min.), 3.0 (max.) | 2.7 |
| Hydrogen-carbon ratio | | 0.169 |
| Net heat of combustion, Btu/lb | 18,400 (min.) | 18,675 |

3636

TABLE IV. - PERFORMANCE OF BORON SLURRY IN 16-INCH RAM-JET COMBUSTOR

| Run | Slurry injector size | Over-all equivalence ratio | Combustion efficiency, percent | Inlet-air - Weight flow, lb/hr | Inlet-air - Pressure, in. Hg abs | Inlet-air - Temperature, °F | Inlet-air - Velocity, ft/sec | Fuel weight flow, lb/hr - Slurry | Fuel weight flow, lb/hr - Engine JP-4 | Fuel weight flow, lb/hr - Preheater JP-4 | Fuel weight flow, lb/hr - Pilot gasoline | Boron in total fuel, percent |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Configuration A | | | | | | | | | | | | |
| 1 | 0.188 | 0.389 | 34.7 | 45,600 | 31.8 | 575 | 221 | 1,500 | 0 | 87 | 58 | 62.2 |
| | | .507 | 53.4 | 46,600 | 32.9 | 562 | 216 | 2,020 | | | | 62.8 |
| | | .745 | 69.3 | 46,300 | 35.6 | 560 | 198 | 2,980 | | | | 63.4 |
| | | .900 | 67.3 | 46,000 | 37.1 | 570 | 191 | 3,590 | | | | 63.6 |
| | | 1.105 | 63.1 | 46,000 | 39.0 | 570 | 181 | 4,430 | | | | 63.7 |
| 2 | 0.116 | 0.428 | 29.2 | 44,000 | 29.5 | 583 | 231 | 1,500 | 0 | 95 | 43 | 48.6 |
| | | .480 | 44.8 | 52,900 | 29.0 | 578 | 282 | 2,060 | | | | 48.9 |
| | | .547 | 60.0 | 45,300 | 29.2 | 578 | 240 | 2,000 | | | | 48.9 |
| | | .619 | 61.9 | 52,600 | 29.5 | 578 | 276 | 2,660 | | | | 49.2 |
| | | 1.031 | 59.7 | 44,500 | 29.5 | 578 | 233 | 3,760 | | | | 49.4 |
| 3 | None | 0.186 | 50.0 | 44,400 | 28.6 | 568 | 238 | 0 | 510 | 87 | 50 | 0 |
| | | .257 | 65.9 | 49,600 | 29.6 | 478 | 234 | | 819 | 0 | 50 | |
| | | .279 | 62.1 | 48,500 | 31.7 | 591 | 239 | | 847 | 105 | 43 | |
| | | .283 | 78.0 | 45,700 | 30.0 | 564 | 232 | | 840 | 95 | 10 | |
| | | .317 | 73.4 | 42,900 | 30.0 | 585 | 222 | | 839 | 85 | 58 | |
| | | .338 | 69.0 | 49,200 | 30.3 | 492 | 230 | | 1,120 | 0 | 12 | |
| | | .357 | 79.5 | 45,300 | 31.5 | 579 | 224 | | 1,010 | 118 | 45 | |
| | | .413 | 83.1 | 46,000 | 30.0 | 562 | 234 | | 1,250 | 95 | 0 | |
| | | .416 | 87.2 | 44,300 | 30.0 | 572 | 227 | | 1,200 | 85 | 52 | |
| | | .428 | 79.6 | 48,700 | 32.7 | 588 | 233 | | 1,320 | 105 | 47 | |
| | | .472 | 86.9 | 42,800 | 30.0 | 570 | 220 | | 1,290 | 85 | 42 | |
| Configuration B | | | | | | | | | | | | |
| 4 | 0.260 | 0.239 | 62.7 | 46,100 | 29.8 | 570 | 237 | 738 | 0 | 406 | 62 | 46.1 |
| | | .375 | 72.3 | 45,800 | 31.8 | | 222 | 1,190 | | | | 47.5 |
| | | .467 | 78.4 | 45,800 | 32.5 | | 217 | 1,500 | | | | 48.0 |
| | | .474 | 70.0 | 46,000 | 32.3 | | 219 | 1,540 | | | | 48.1 |
| | | .570 | 69.8 | 45,800 | 33.0 | | 214 | 1,850 | | | | 48.4 |
| | | .660 | 75.0 | 46,000 | 34.3 | | 206 | 2,170 | | | | 48.6 |
| | | .716 | 68.8 | 45,800 | 34.3 | | 206 | 2,350 | | | | 48.7 |
| | | .870 | 50.8 | 46,000 | 30.5 | | 232 | 2,890 | | | | 49.0 |
| 5 | 0.116 | 0.204 | 73.2 | 46,000 | 30.0 | 590 | 242 | 995 | 0 | 100 | 37 | 48.2 |
| | | .321 | 82.4 | 45,900 | 30.2 | 595 | 260 | 1,590 | 0 | 100 | 37 | 48.9 |
| | | .427 | 84.0 | 45,600 | 30.2 | 595 | 237 | 2,120 | 0 | 100 | 41 | 49.1 |
| 6 | 0.116 | 0.342 | 72.8 | 29,500 | 20.0 | 588 | 230 | 813 | 0 | 80 | 12 | 49.3 |
| | | .450 | 74.5 | 28,400 | 21.4 | 587 | 207 | 1,030 | | | | 49.4 |
| | | .645 | 70.0 | 28,000 | 22.0 | 588 | 200 | 1,470 | | | | 49.7 |
| | | .786 | 62.4 | 28,000 | 20.9 | 588 | 209 | 1,790 | | | | 49.7 |
| | | .927 | 56.5 | 28,000 | 21.4 | 590 | 205 | 2,110 | | | | 49.8 |
| | | 1.082 | 53.7 | 28,000 | 22.2 | 590 | 197 | 2,470 | | | | 49.9 |
| 7 | 0.116 | 0.299 | 63.2 | 44,100 | 29.8 | 580 | 228 | 1,045 | 0 | 86 | 41 | 51.2 |

3636

CJ-3 back

TABLE IV. - Continued. PERFORMANCE OF BORON SLURRY IN 16-INCH RAM-JET COMBUSTOR

| Run | Slurry injector size | Over-all equivalence ratio | Combustion efficiency, percent | Inlet-air - Weight flow, lb/hr | Inlet-air - Pressure, in. Hg abs | Inlet-air - Temperature, °F | Inlet-air - Velocity, ft/sec | Fuel weight flow, lb/hr - Slurry | Fuel weight flow, lb/hr - Engine JP-4 | Fuel weight flow, lb/hr - Preheater JP-4 | Fuel weight flow, lb/hr - Pilot gasoline | Boron in total fuel, percent |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Configuration B, continued | | | | | | | | | | | | |
| 8 | None | 0.248 | 87.7 | 48,500 | 31.6 | 588 | 240 | 0 | 681 | 415 | 30 | 0 |
| | | .249 | 82.4 | 48,400 | 30.0 | 596 | 248 | | 681 | 415 | 30 | |
| | | .260 | 85.8 | 45,800 | 30.2 | 570 | 233 | | 658 | 406 | 41 | |
| | | .270 | 86.2 | 45,100 | 29.5 | 580 | 237 | | 784 | 100 | 43 | |
| | | .303 | 87.6 | 45,300 | 31.5 | 576 | 222 | | 862 | 86 | 40 | |
| | | .351 | 86.0 | 47,600 | 30.0 | 596 | 250 | | 950 | 415 | 30 | |
| | | .360 | 88.1 | 29,700 | 18.1 | 572 | 252 | | 680 | 80 | 16 | |
| | | .363 | 90.7 | 48,500 | 32.1 | 586 | 235 | | 1,010 | 415 | 30 | |
| | | .425 | 89.4 | 49,200 | 32.6 | 582 | 234 | | 1,230 | 415 | 2 | |
| | | .456 | 86.9 | 47,700 | 30.0 | 592 | 250 | | 1,250 | 415 | 30 | |
| | | .499 | 91.5 | 48,400 | 30.0 | 595 | 253 | | 1,390 | 415 | 30 | |
| | | .502 | 88.2 | 29,700 | 17.8 | 572 | 256 | | 956 | 80 | 16 | |
| Configuration C | | | | | | | | | | | | |
| 9 | 0.188 | 0.443 | 58.4 | 48,800 | 34.2 | 516 | 207 | 836 | 831 | 0 | 19 | 32.2 |
| | | .606 | 67.9 | 47,600 | 35.5 | 524 | 196 | 1,410 | | 95 | | 40.5 |
| | | .750 | 75.0 | 47,800 | 37.7 | 527 | 187 | 2,040 | | 95 | | 45.8 |
| | | .985 | 75.8 | 47,200 | 39.8 | 530 | 174 | 2,970 | | 95 | | 50.5 |
| 10 | 0.188 | 0.370 | 31.2 | 47,500 | 33.2 | 530 | 211 | 811 | 536 | 95 | 19 | 38.5 |
| | | .481 | 47.5 | 49,100 | 34.7 | 506 | 202 | 1,410 | | 0 | | 46.6 |
| | | .617 | 63.5 | 49,400 | 36.6 | 498 | 194 | 2,040 | | 0 | | 51.0 |
| | | .809 | 66.1 | 50,300 | 38.6 | 490 | 185 | 2,970 | | 0 | | 54.7 |
| 11 | 0.188 | 0.495 | 65.1 | 48,700 | 30.0 | 594 | 254 | 772 | 830 | 415 | 30 | 29.6 |
| | | .647 | 61.6 | 48,700 | 30.4 | 590 | 250 | 1,350 | 830 | 415 | 30 | 38.1 |
| | | .814 | 73.3 | 48,200 | 30.6 | 584 | 244 | 1,940 | 830 | 415 | 2 | 43.1 |
| | | 1.010 | 73.0 | 50,500 | 30.5 | 480 | 232 | 2,890 | 840 | 415 | 30 | 47.7 |
| | | 1.052 | 62.0 | 48,200 | 30.0 | 566 | 245 | 2,840 | 830 | 415 | 30 | 47.9 |
| Configuration D | | | | | | | | | | | | |
| 12 | 0.250 | 0.237 | 22.7 | 47,600 | 28.5 | 560 | 254 | 757 | 0 | 415 | 62 | 46.2 |
| | | .332 | 59.8 | 47,000 | 30.7 | 560 | 235 | 1,090 | | | | 47.3 |
| | | .449 | 67.5 | 47,500 | 32.5 | 560 | 222 | 1,500 | | | | 48.0 |
| | | .560 | 72.3 | 47,200 | 30.0 | 565 | 240 | 1,880 | | | | 48.4 |
| | | .697 | 70.5 | 46,700 | 30.5 | 565 | 234 | 2,330 | | | | 48.7 |
| | | .808 | 62.5 | 46,400 | 30.7 | 565 | 231 | 2,730 | | | | 48.9 |
| 13 | 0.188 | 0.308 | 53.1 | 46,300 | 29.8 | 570 | 238 | 977 | 0 | 415 | 58 | 47.2 |
| | | .460 | 77.8 | 46,300 | 30.3 | 570 | 234 | 1,500 | | | | 48.1 |
| | | .606 | 76.1 | 46,300 | 29.8 | 568 | 238 | 2,000 | | | | 48.6 |
| | | .791 | 72.1 | 46,300 | 29.8 | 568 | 238 | 2,630 | | | | 48.9 |
| 14 | 0.188 | 0.300 | 61.5 | 37,000 | 30.2 | 556 | 185 | 738 | 0 | 415 | 39 | 47.5 |
| 15 | None | 0.375 | 91.4 | 47,200 | 30.1 | 562 | 239 | 0 | 978 | 415 | 60 | 0 |
| | | .509 | 92.7 | 47,200 | 31.0 | 560 | 231 | 0 | 1,360 | | 54 | 0 |

3636

TABLE IV. - Concluded. PERFORMANCE OF BORON SLURRY IN 16-INCH RAM-JET COMBUSTOR

| Run | Slurry injector size | Over-all equivalence ratio | Combustion efficiency, percent | Inlet-air - Weight flow, lb/hr | Inlet-air - Pressure, in. Hg abs | Inlet-air - Temperature, °F | Inlet-air - Velocity, ft/sec | Fuel weight flow, lb/hr - Slurry | Fuel weight flow, lb/hr - Engine JP-4 | Fuel weight flow, lb/hr - Preheater JP-4 | Fuel weight flow, lb/hr - Pilot gasoline | Boron in total fuel, percent |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Configuration E | | | | | | | | | | | | |
| 16 | 0.188 | 0.254 | 70.0 | 43,300 | 30.0 | 570 | 221 | 850 | 0 | 82 | 60 | 48.3 |
| | | .337 | 74.0 | 43,100 | 30.0 | 580 | 223 | 1,200 | | | 17 | 49.4 |
| | | .445 | 68.1 | 43,000 | 30.0 | 580 | 222 | 1,590 | | | 12 | 51.4 |
| | | .561 | 63.8 | 43,000 | 30.0 | 580 | 222 | 2,010 | | | 12 | 51.5 |
| | | .704 | 55.4 | 43,400 | 31.0 | 570 | 215 | 2,490 | | | 60 | 50.6 |
| 17 | 0.188 | 0.358 | 70.7 | 48,000 | 30.3 | 553 | 240 | 811 | 482 | 0 | 42 | 30.9 |
| | | .447 | 72.0 | 48,200 | 29.8 | 544 | 242 | 1,180 | 482 | | | 35.2 |
| | | .539 | 71.8 | 48,300 | 30.3 | 540 | 238 | 1,560 | 490 | | | 37.9 |
| | | .632 | 66.1 | 48,500 | 30.5 | 530 | 235 | 1,960 | 490 | | | 40.0 |
| 18 | 0.188 | 0.349 | 55.8 | 46,700 | 29.3 | 554 | 241 | 798 | 400 | 118 | 35 | 32.4 |
| | | .438 | 64.4 | 47,400 | 30.2 | 550 | 236 | 1,160 | | | | 36.4 |
| | | .538 | 68.6 | 46,900 | 30.3 | 554 | 234 | 1,530 | | | | 39.0 |
| | | .645 | 66.5 | 46,500 | 30.2 | 560 | 234 | 1,920 | | | | 40.8 |
| | | .779 | 61.0 | 46,200 | 30.2 | 568 | 234 | 2,420 | | | | 42.4 |
| | | .191 | 75.2 | 46,700 | 29.5 | 587 | 242 | 0 | 535 | | | 0 |
| | | .355 | 86.8 | 45,900 | 30.3 | 588 | 236 | 0 | 1,030 | | | 0 |
| | | .556 | 84.0 | 45,600 | 30.3 | 590 | 235 | 0 | 1,620 | | 33 | 0 |
| 19 | 0.188 | 0.357 | 72.3 | 44,500 | 29.5 | 576 | 233 | 798 | 400 | 95 | 12 | 33.0 |
| | | .459 | 67.3 | 44,200 | 30.0 | 582 | 229 | 1,160 | | | | 36.9 |
| | | .561 | 60.0 | 44,100 | 30.0 | 588 | 230 | 1,540 | | | | 39.5 |
| | | .667 | 51.8 | 44,100 | 30.0 | 590 | 230 | 1,920 | | | | 41.2 |
| | | .801 | 48.0 | 44,300 | 30.0 | 588 | 231 | 2,420 | | | | 42.7 |
| | | .209 | 90.7 | 44,300 | 30.0 | 561 | 226 | 0 | 575 | | 32 | 0 |
| | | .310 | 87.9 | 45,800 | 30.0 | 562 | 232 | | 900 | | 32 | |
| | | .394 | 83.0 | 45,500 | 30.0 | 566 | 231 | | 1,160 | | 19 | |
| | | .429 | 82.1 | 45,600 | 30.0 | 564 | 231 | | 1,260 | | 31 | |
| Configuration F | | | | | | | | | | | | |
| 20 | 0.250 | 0.220 | 26.4 | 44,800 | 31.0 | 570 | 222 | 704 | 0 | 415 | 16 | 48.9 |
| | | .342 | 45.2 | 45,300 | 27.3 | 570 | 255 | 1,070 | | | 51 | 47.7 |
| | | .477 | 58.6 | 45,300 | 30.5 | 573 | 229 | 1,510 | | | 62 | 48.0 |
| | | .600 | 65.5 | 45,300 | 30.0 | 572 | 233 | 1,920 | | | | 48.4 |
| | | .747 | 67.2 | 44,900 | 30.5 | 572 | 226 | 2,390 | | | | 48.4 |
| | | .873 | 64.5 | 45,000 | 30.0 | 573 | 231 | 2,810 | | | | 48.9 |
| | | 1.023 | 60.0 | 44,900 | 30.0 | 573 | 231 | 3,300 | | | | 49.1 |
| 21 | 0.188 | 0.572 | 81.6 | 44,800 | 30.0 | 572 | 230 | 753 | 830 | 415 | 62 | 22.9 |
| | | .838 | 82.3 | 44,800 | 30.3 | 575 | 230 | 1,670 | | | 31 | 33.0 |
| | | 1.210 | 78.8 | 42,200 | 30.0 | 584 | 219 | 2,650 | | | 10 | 38.0 |
| 22 | 0.188 | 0.436 | 44.1 | 46,700 | 30.3 | 560 | 234 | 746 | 540 | 415 | 62 | 27.7 |
| | | .605 | 61.7 | 45,800 | 30.1 | 563 | 232 | 1,290 | | | | 34.1 |
| | | .805 | 73.1 | 45,700 | 30.4 | 565 | 230 | 1,950 | | | | 38.2 |
| | | 1.038 | 71.7 | 44,500 | 30.2 | 570 | 226 | 2,640 | | | | 40.8 |
| 23 | None | 0.287 | 65.1 | 44,500 | 30.0 | 567 | 227 | 0 | 680 | 415 | 62 | 0 |
| | | .324 | 86.4 | 44,500 | 29.0 | 550 | 230 | | 780 | | 60 | |
| | | .395 | 95.6 | 45,700 | 30.0 | 565 | 232 | | 990 | | 62 | |
| | | .438 | 89.4 | 44,500 | 30.0 | 550 | 223 | | 1,100 | | 35 | |
| | | .543 | 96.3 | 44,700 | 30.0 | 567 | 228 | | 1,350 | | 62 | |

CONFIDENTIAL

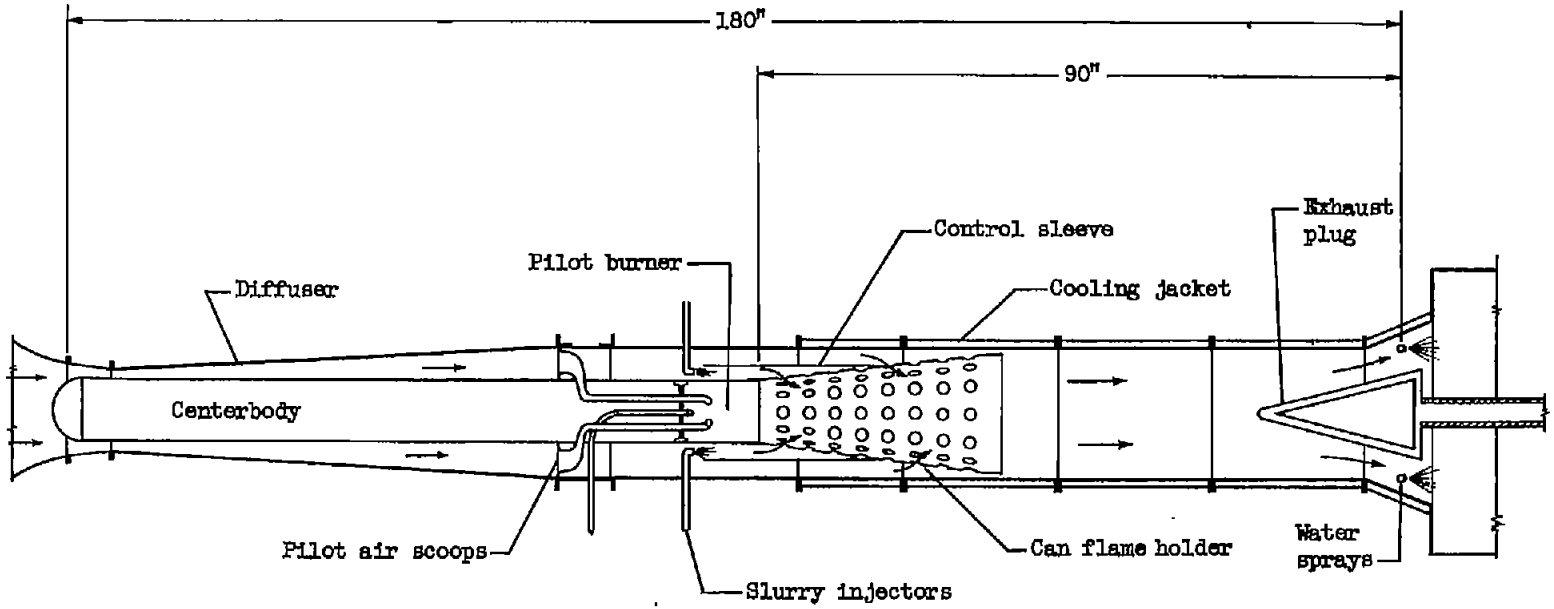


CD-4139

Figure 1. - Sketch of 16-inch ram-jet engine showing position of slurry injectors, control sleeve, pilot flame holder, and exhaust plug.

CONFIDENTIAL

CONFIDENTIAL

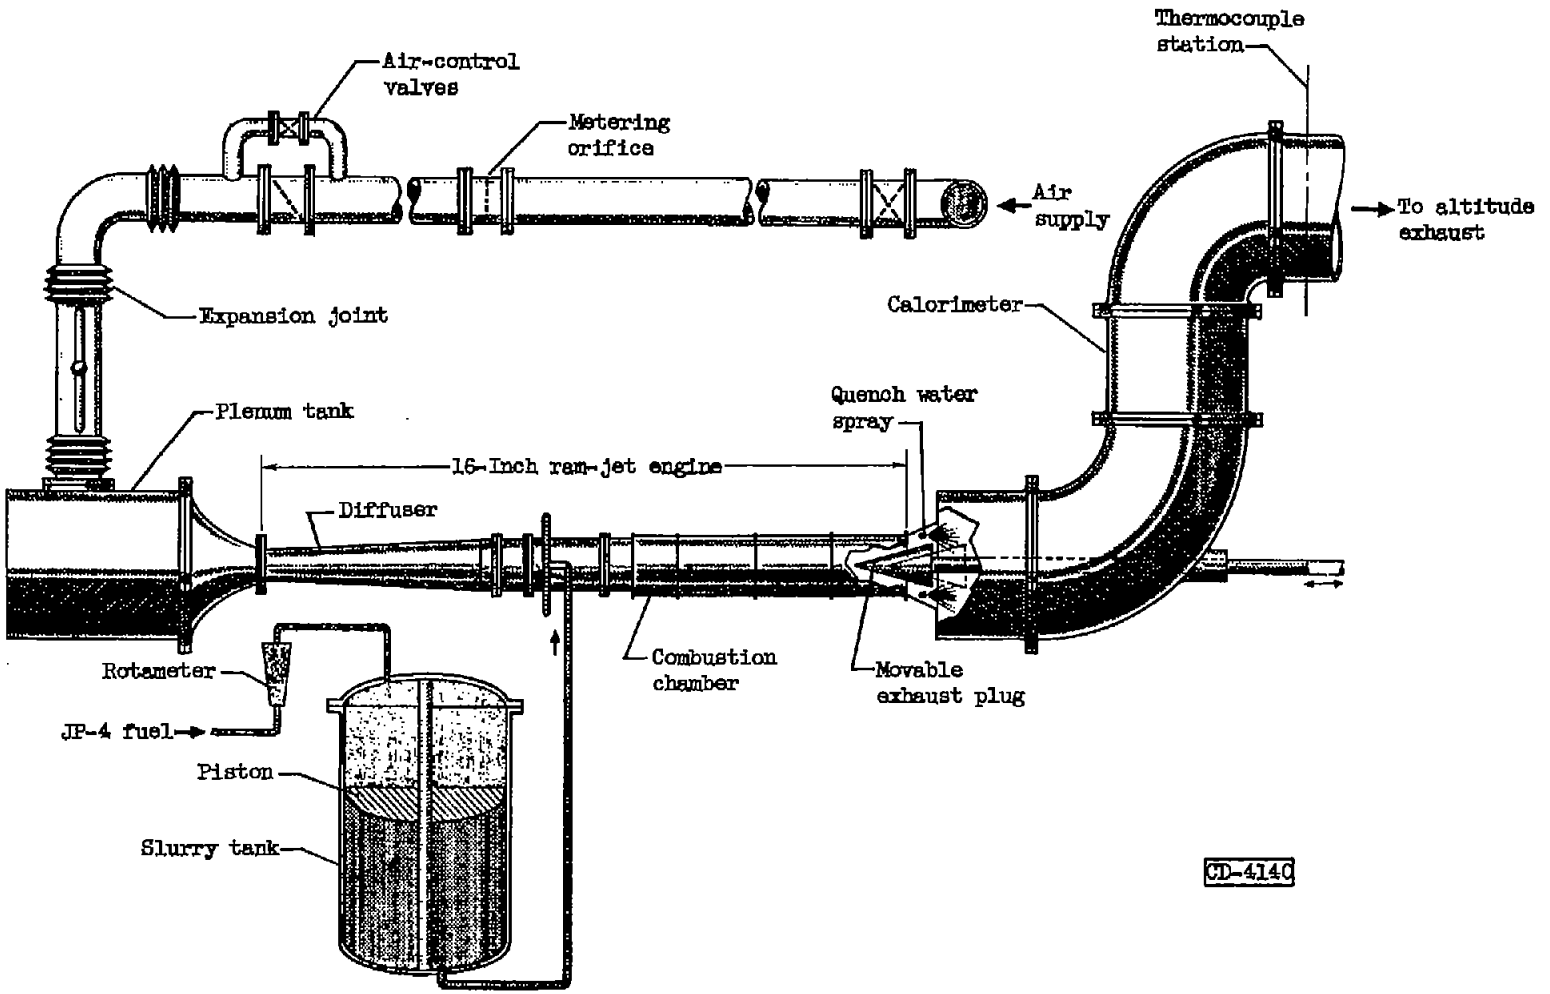


Figure 2. - Installation of 16-inch ram-jet engine.

CONFIDENTIAL

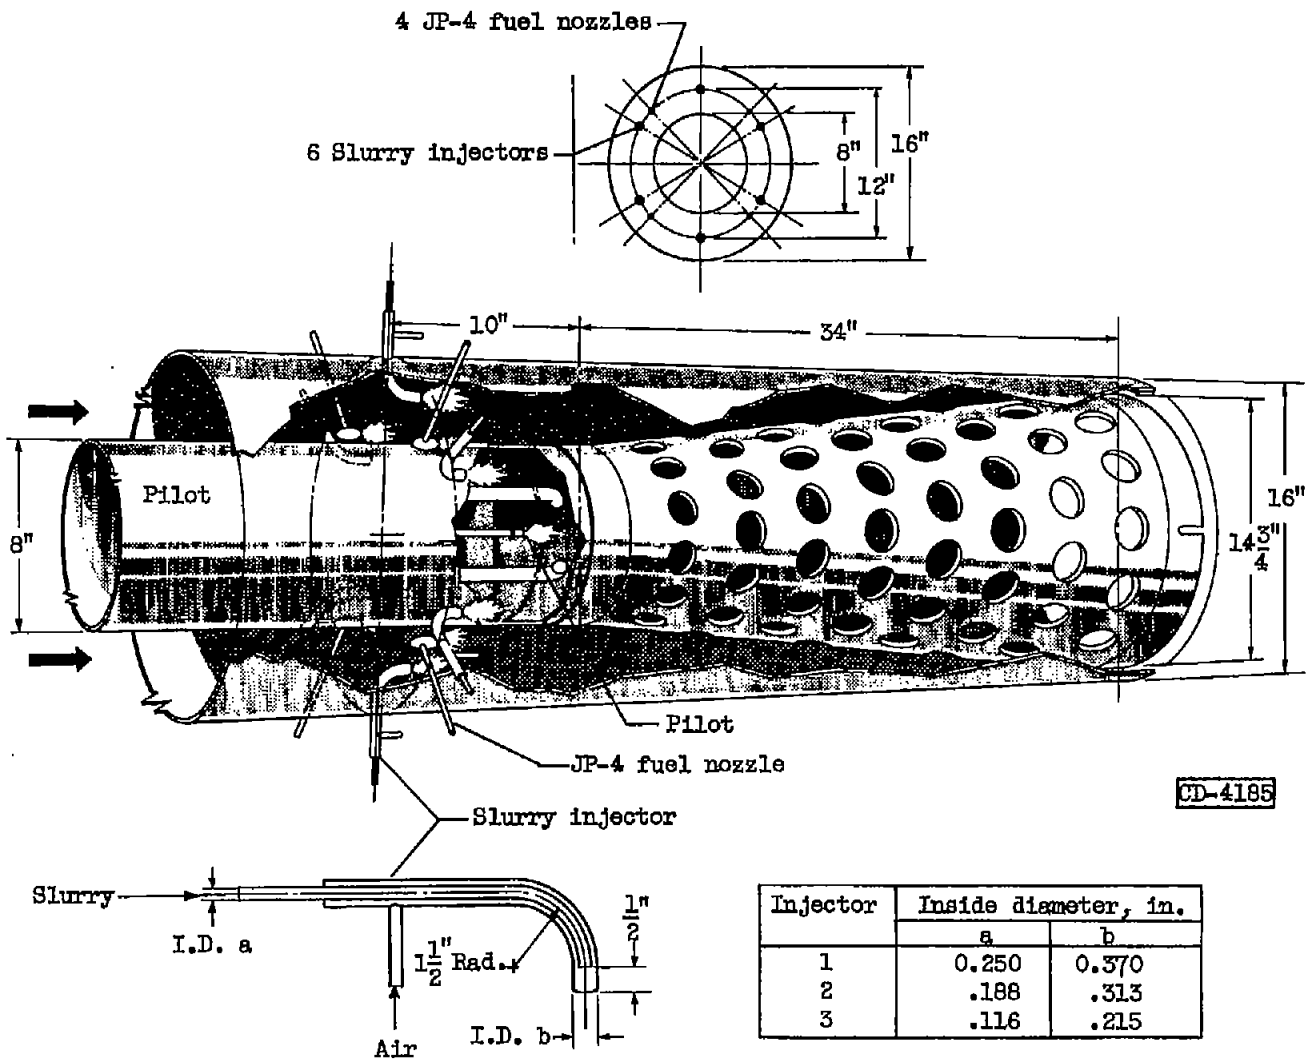


| Injector | Inside diameter, in. | |
|---|---|---|
| | a | b |
| 1 | 0.250 | 0.370 |
| 2 | .188 | .313 |
| 3 | .116 | .215 |

(a) Configuration A.

Figure 3. - Fuel-injector and flame holder configurations.

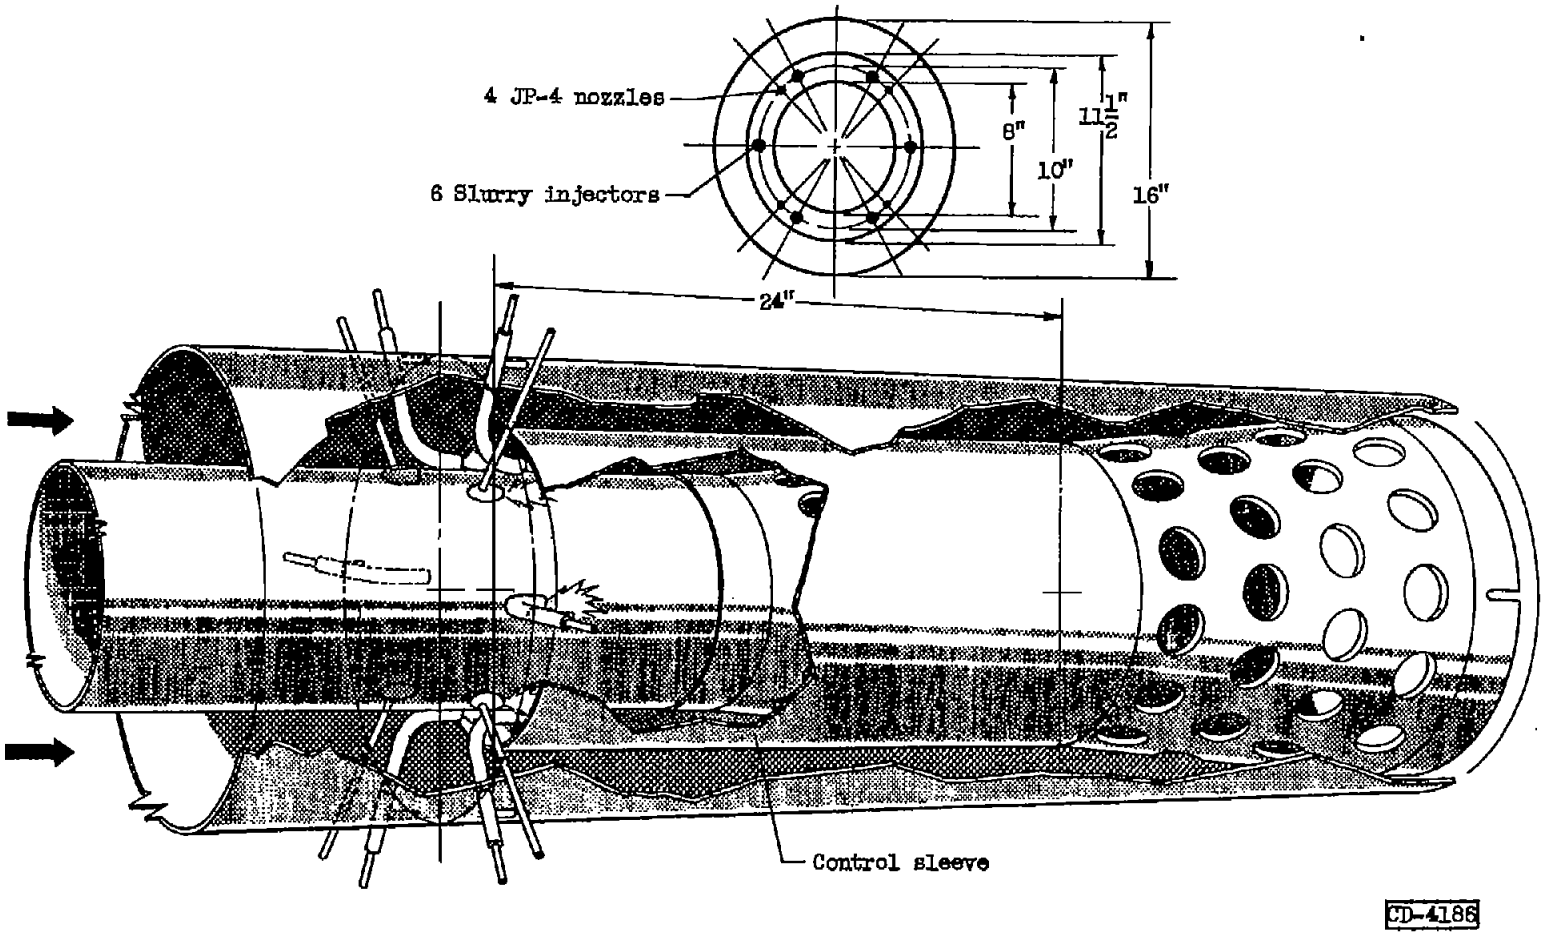


(b) Configuration B.

Figure 3. - Continued. Fuel-injector and flame holder configurations.

CONFIDENTIAL

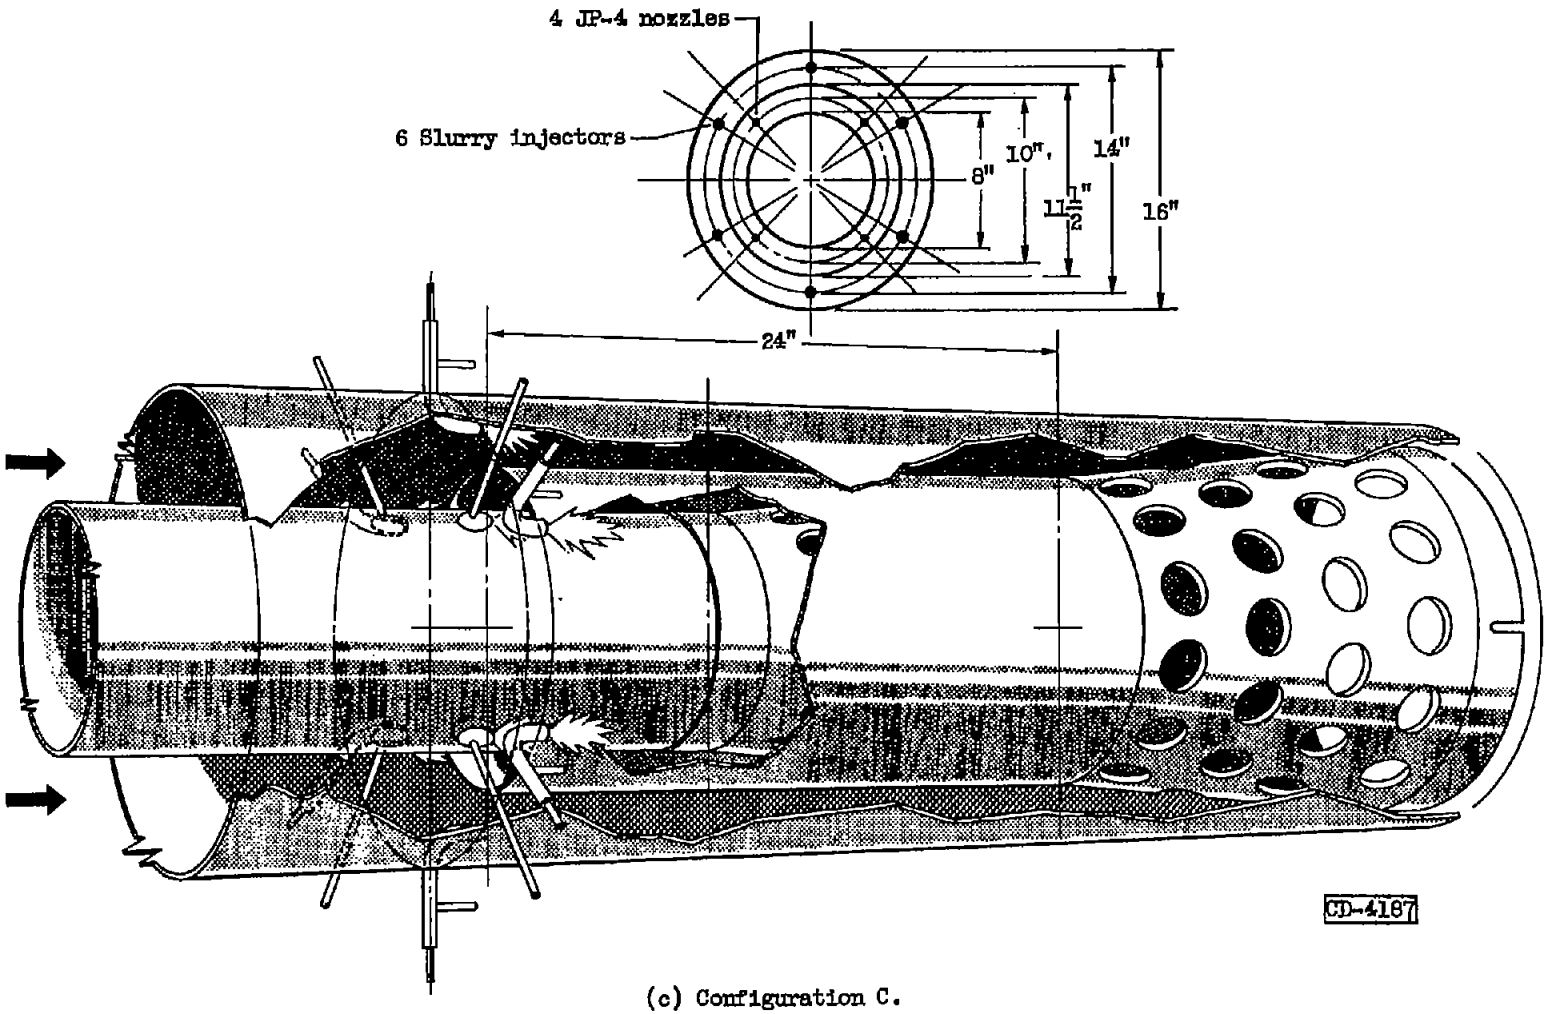


(c) Configuration C.

Figure 3. - Continued. Fuel-injector and flame holder configurations.

CONFIDENTIAL

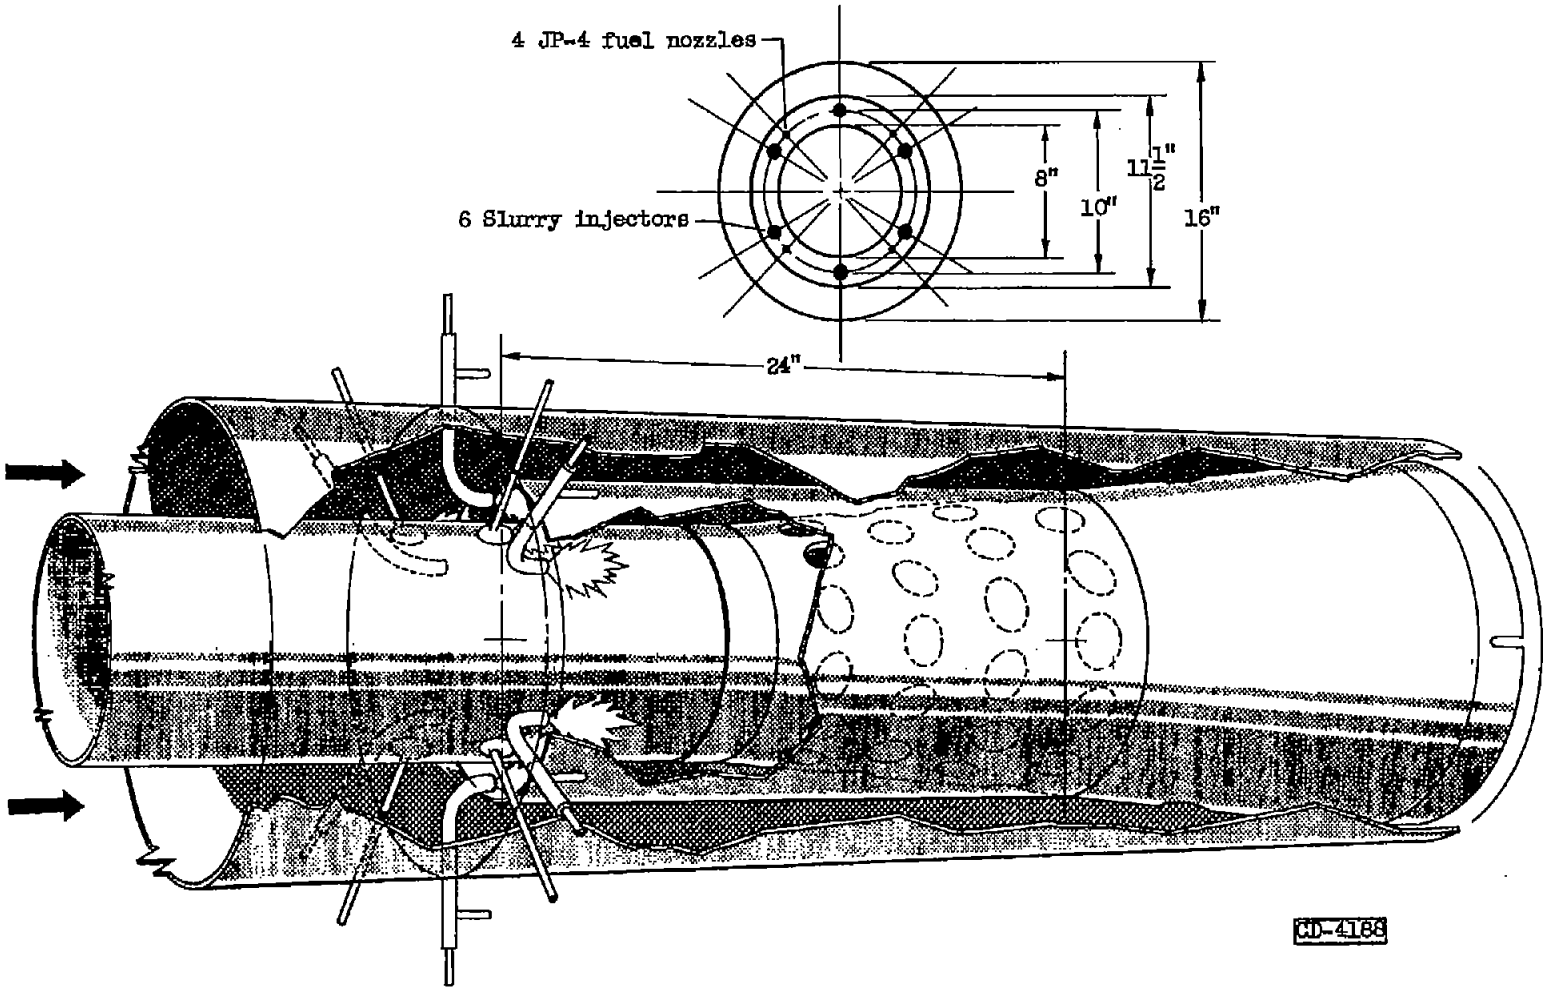


(d) Configuration D.

Figure 3. - Continued. Fuel-injector and flame holder configurations.

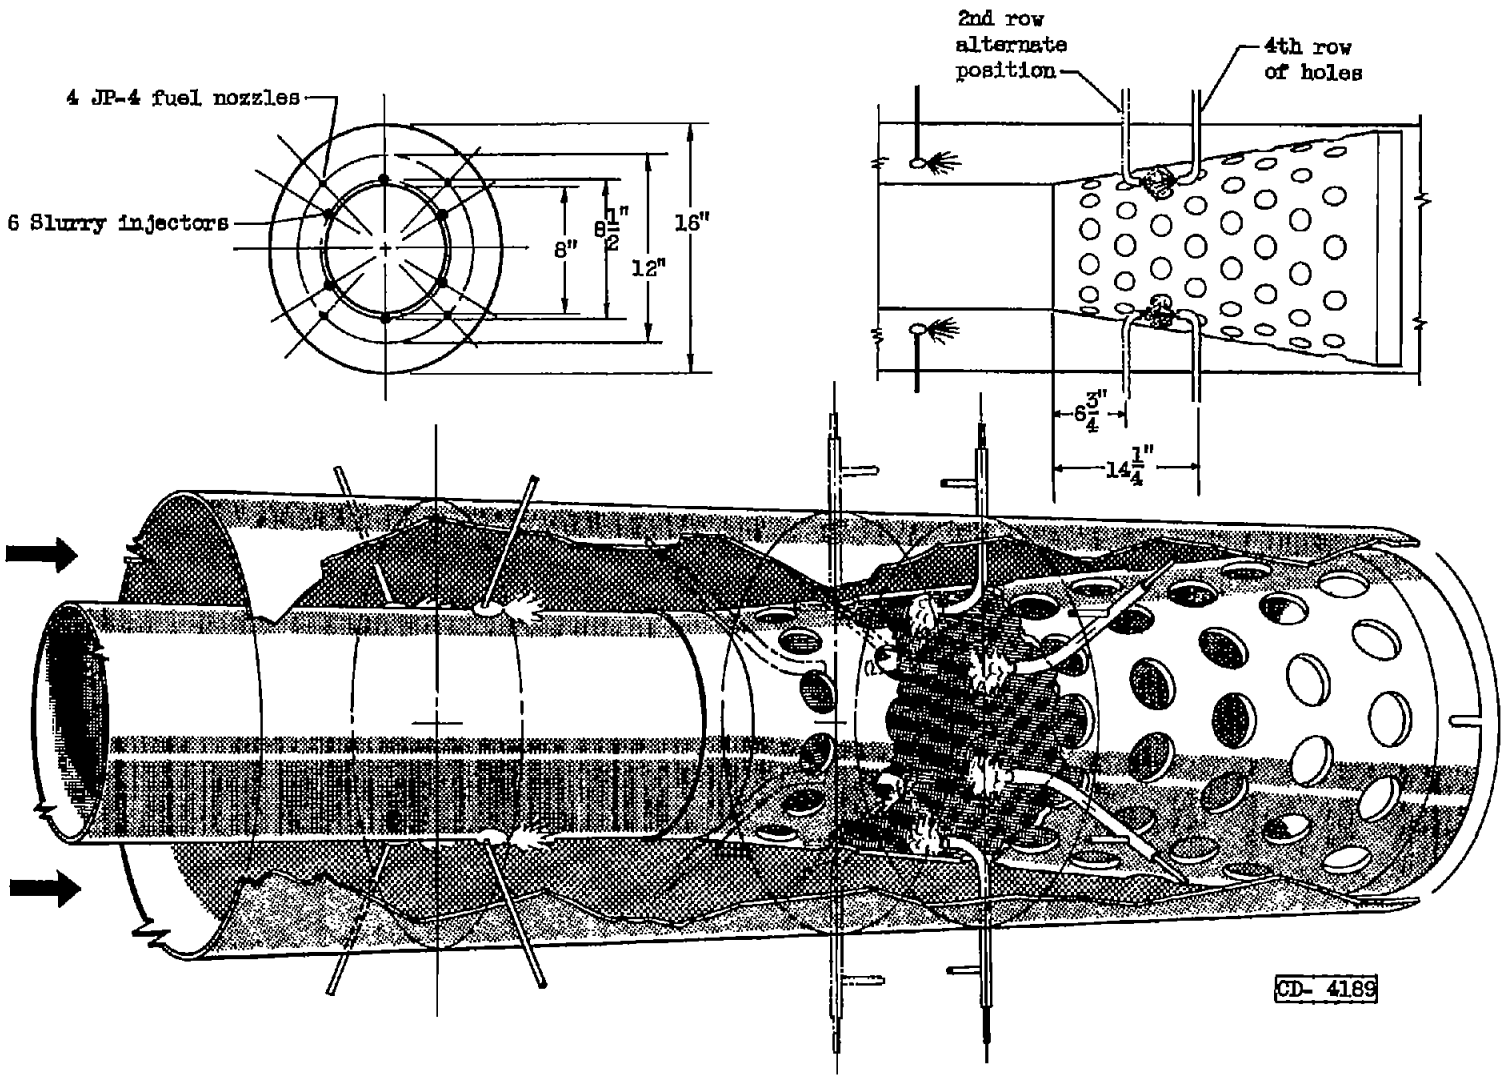


(e) Configuration E.

Figure 3. - Continued. Fuel-injector and flame holder configurations.

CONFIDENTIAL

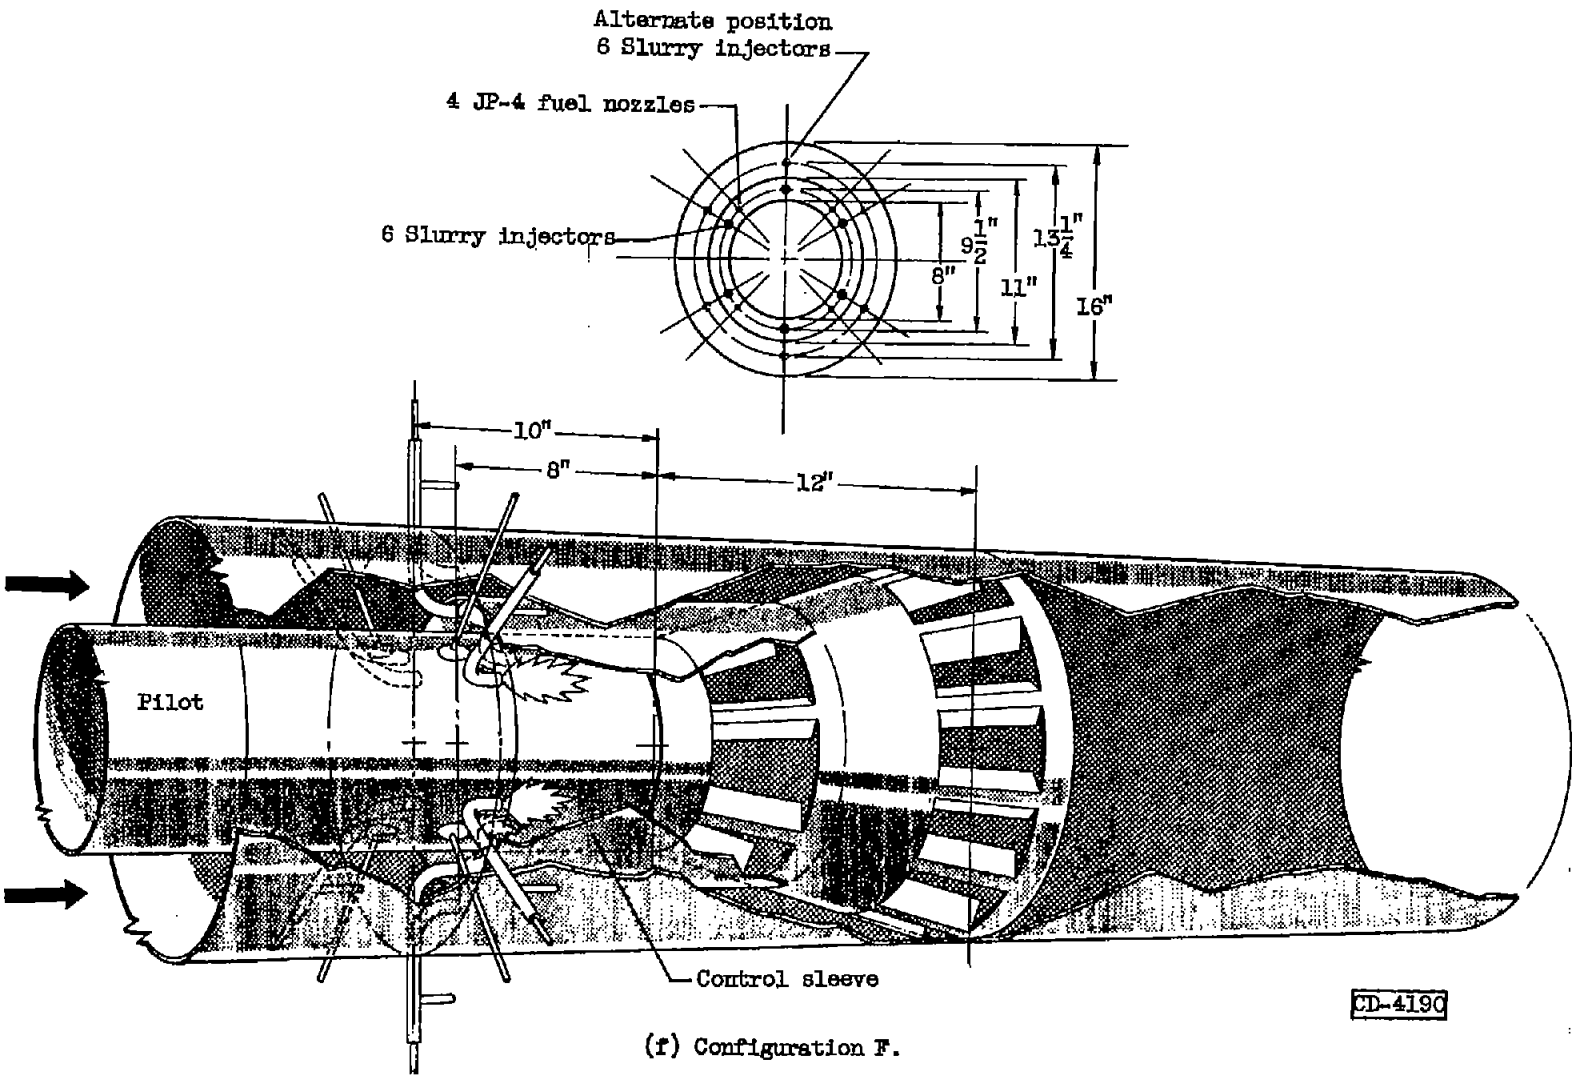


(f) Configuration F.

Figure 3. - Concluded. Fuel-injector and flame holder configurations.

CONFIDENTIAL

3636

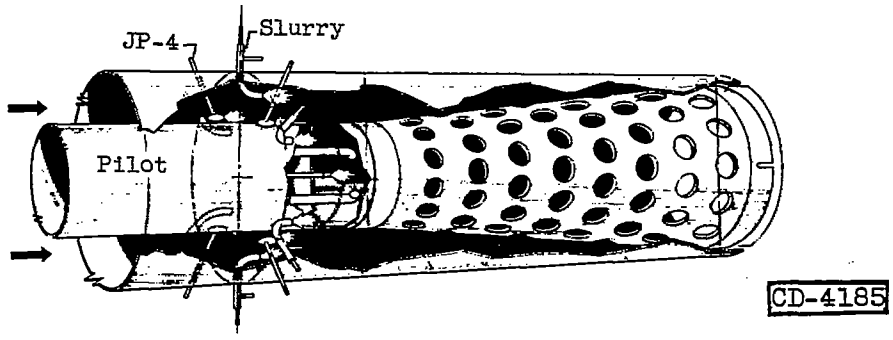


| | Run | Injector direction | Inlet-air temperature, °F | Inlet-air velocity, ft/sec | Inlet-air pressure, in. Hg abs | Injector I.D., in. | Slurry composition |
|---|---|---|---|---|---|---|---|
| ○ | 1 | Costream | 560-575 | 181-221 | 32.0-39.0 | 0.188 | 65-Percent boron in n-heptane |
| □ | 2 | Contra-stream | 578-583 | 231-282 | 29.0-29.5 | .116 | 50-Percent boron in JP-4 |
| ◇ | 3 | Costream | 575 (av.) | 235 (av.) | 30.0 (av.) | Spray nozzle | JP-4 alone |

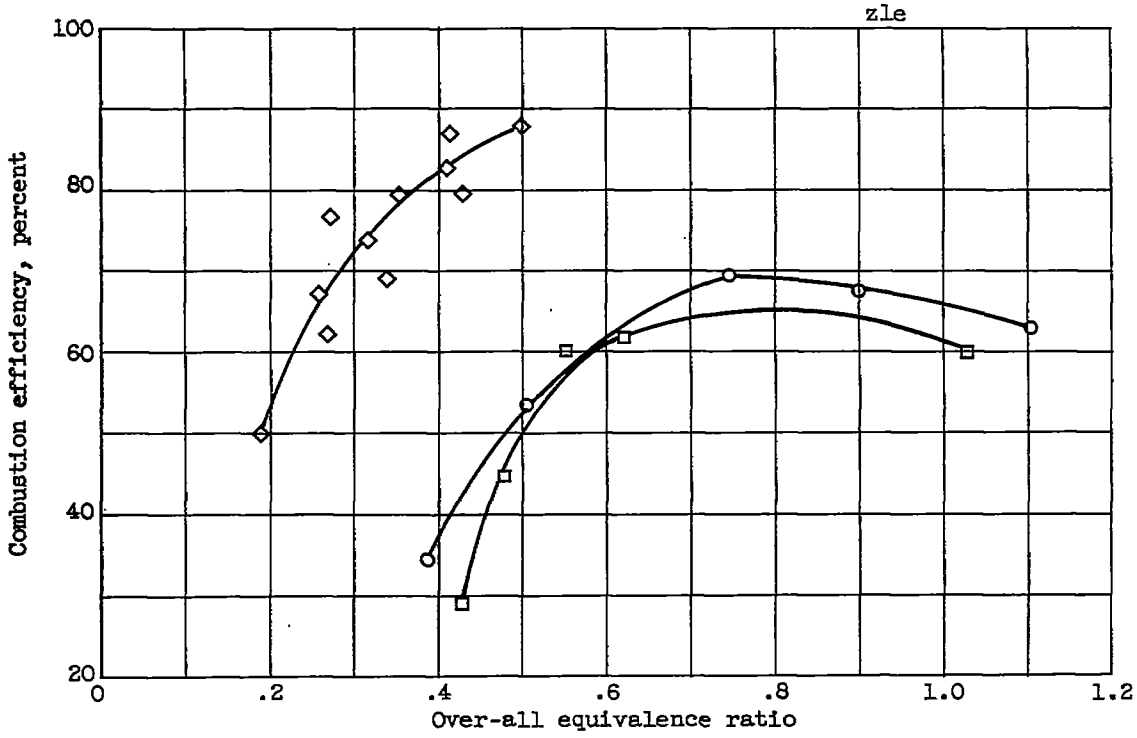


(a) Configuration A. Comparison of performance of boron slurries and JP-4 fuel.

Figure 4. - Performance of combustor configurations.

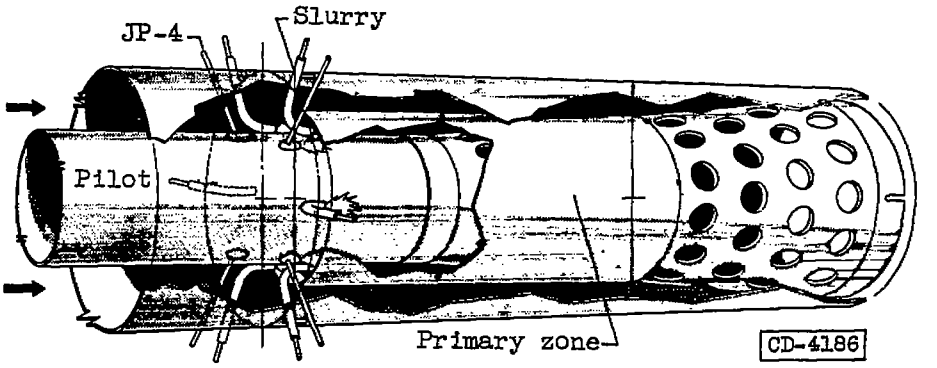


| | Run | Inlet-air temperature, °F | Inlet-air velocity, ft/sec | Inlet-air pressure, in. Hg abs | Injector I.D., in. | Slurry composition | Nominal boron purity, percent |
|---|---|---|---|---|---|---|---|
| ○ | 4 | 570 | 206-237 | 29.8-34.3 | 0.250 | 50-Percent boron in JP-4 | 90 |
| □ | 5 | 590-595 | 237-260 | 30.0-30.2 | .116 | | 90 |
| ◇ | 6 | 587-590 | 197-230 | 20.0-22.2 | .116 | | 90 |
| △ | 7 | 580 | 228 | 29.8 | .116 | | 96 |
| ▽ | 8 | 575 (av.) | 235 (av.) | 30.0 (av.) | Spray nozzle | JP-4 alone | |

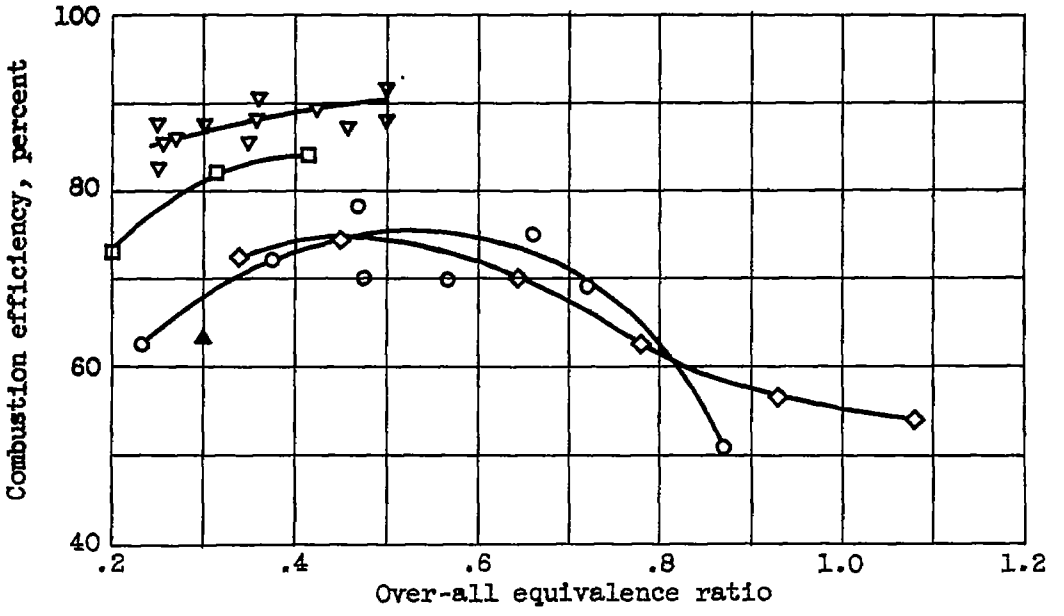


(b) Configuration B. Slurry injected costream into primary zone; combustion air vitiated.

Figure 4. - Continued. Performance of combustor configurations.

3636

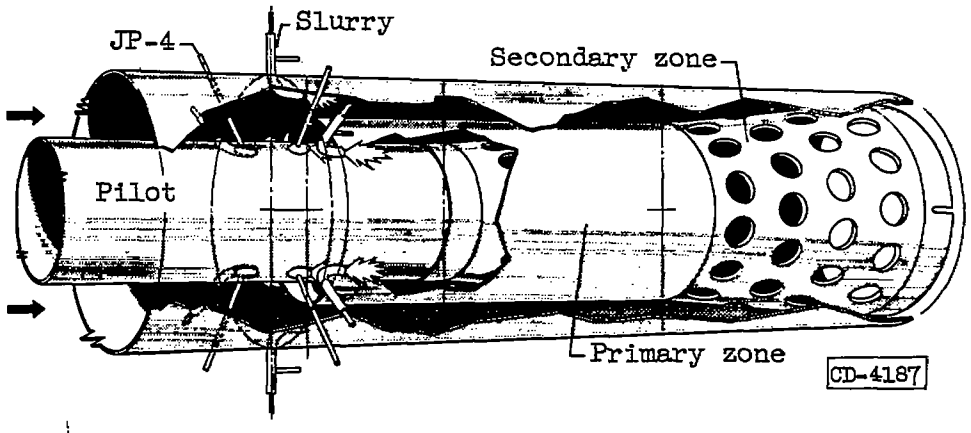


| | Run | Inlet-air temperature, °F | Inlet-air velocity, ft/sec | Inlet-air pressure, in. Hg abs | Boron, percent of total fuel | Jp-4 addition to primary zone, lb/hr |
|---|---|---|---|---|---|---|
| ○ | 9 | 516-530 | 174-207 | 34.2-39.8 | 32-50 | 830 |
| □ | 10 | 490-530 | 185-211 | 33.2-38.6 | 38-55 | 535 |
| ◇ | 11 | 480-594 | 232-254 | 30.0-30.6 | 30-48 | 830 |

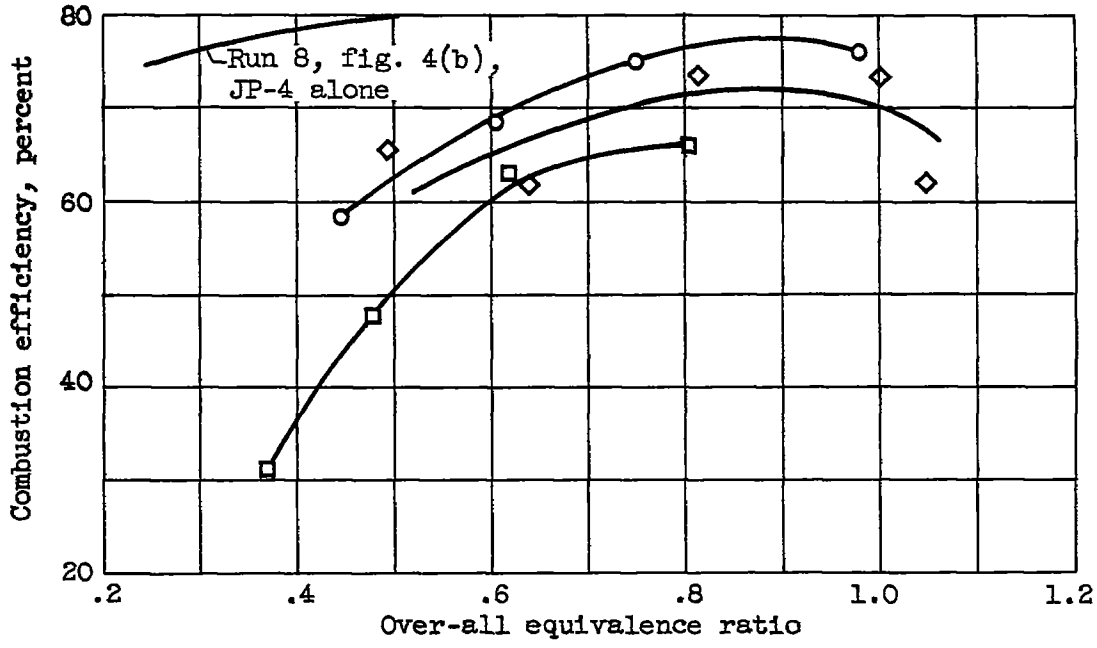


(c) Configuration C. 65-Percent boron in n-heptane injected costream into secondary zone through 0.188-inch injectors.

Figure 4. - Continued. Performance of combustor configurations.

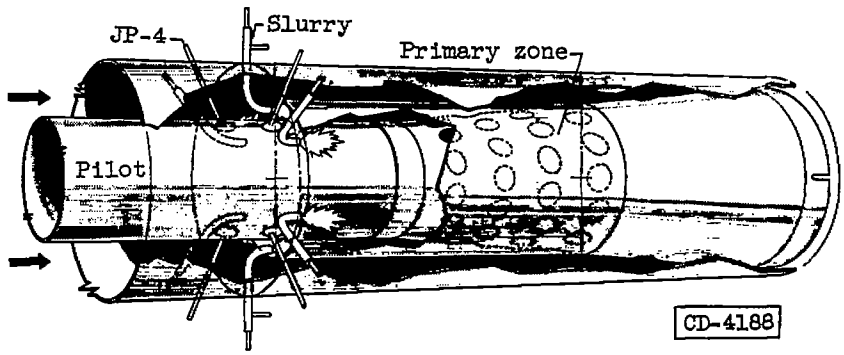


| | Run | Inlet-air temperature, °F | Inlet-air velocity, ft/sec | Inlet-air pressure, in. Hg abs | Injector I.D., in. |
|---|---|---|---|---|---|
| ○ | 12 | 560-565 | 222-254 | 28.5-32.5 | 0.250 |
| □ | 13 | 568-570 | 234-238 | 29.8-30.3 | .188 |
| ◇ | 14 | 556 | 195 | 30.2 | .188 |
| △ | 15 | 562-569 | 231-239 | 30.1-31.0 | Spray nozzle |

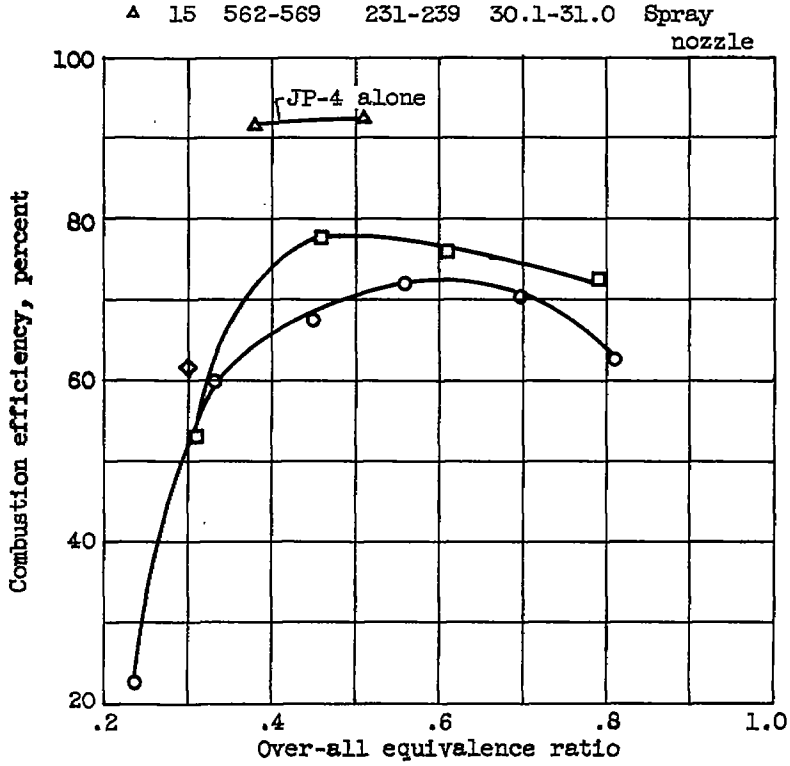


(d) Configuration D. 50-Percent boron in JP-4 injected costream into primary zone.

Figure 4. - Continued. Performance of combustor configurations.

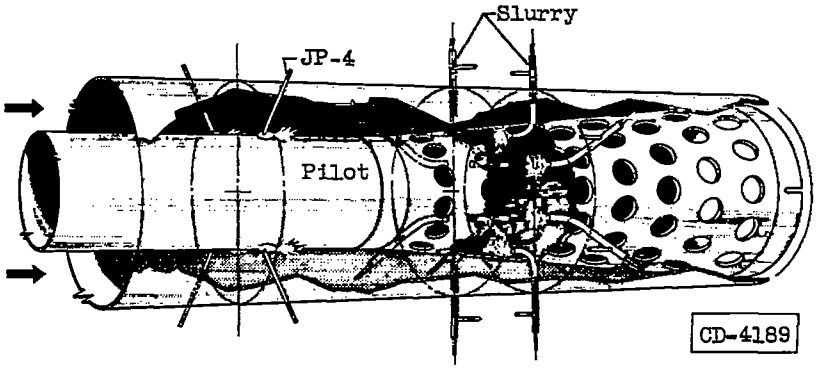


| | Run | Inlet-air temperature, °F | Inlet-air velocity, ft/sec | Inlet-air pressure, in. Hg abs | Boron, percent of total fuel | JP-4 addition upstream of flame holder, lb/hr | Injector position, hole row | Injector direction |
|---|---|---|---|---|---|---|---|---|
| ○ | 16 | 570-580 | 215-223 | 30.0-31.0 | 50 | None | 4th | Contra-stream |
| □ | 17 | 530-553 | 235-242 | 29.8-30.5 | 31-40 | 482-490 | 4th | 4 Contra-stream, 2 costream |
| ◇ | 18 | 550-590 | 234-242 | 29.3-30.3 | 32-42 | 400 | 2nd | Costream |
| △ | 19 | 561-590 | 226-233 | 29.5-30.0 | 33-43 | 400 | 4th | Contra-stream |

Tailed symbols denote JP-4 alone through slurry injectors

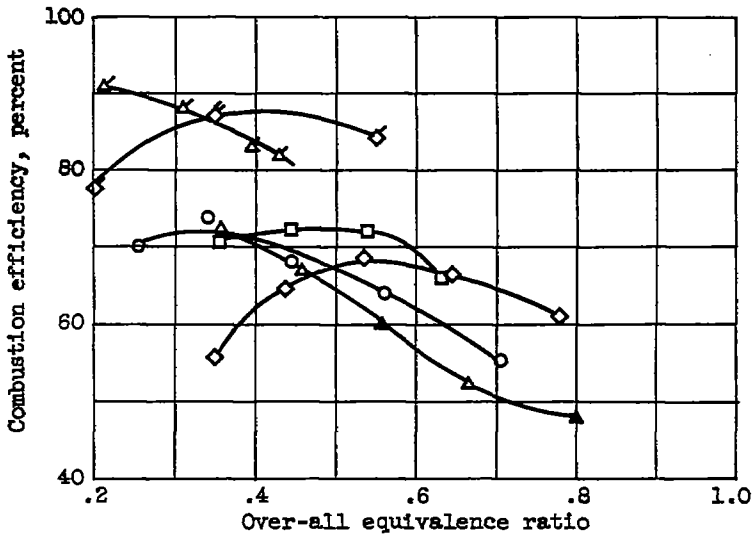


(e) Configuration E. 50-Percent boron in JP-4 injected internally through 0.188-inch injectors.

Figure 4. - Continued. Performance of combustor configurations.

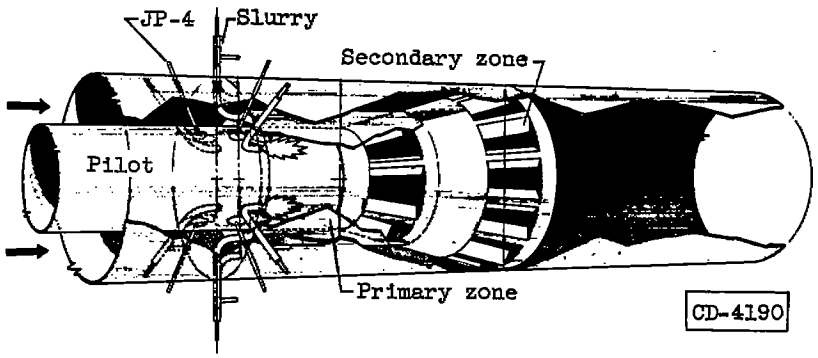


| | Run | Inlet-air temperature, °F | Inlet-air velocity, ft/sec | Inlet-air pressure, in. Hg abs | Boron, percent of total fuel | JP-4 added to primary zone, lb/hr | Injector location |
|---|---|---|---|---|---|---|---|
| ○ | 20 | 570-573 | 222-255 | 27.3-31.0 | 49 | None | Primary zone |
| □ | 21 | 572-584 | 219-230 | 30.0-30.3 | 23-38 | 830 | Secondary zone |
| ◇ | 22 | 560-570 | 226-234 | 30.1-30.4 | 28-41 | 540 | Secondary zone |
| △ | 23 | 550-567 | 223-232 | 29.0-30.0 | None | None | Primary zone |

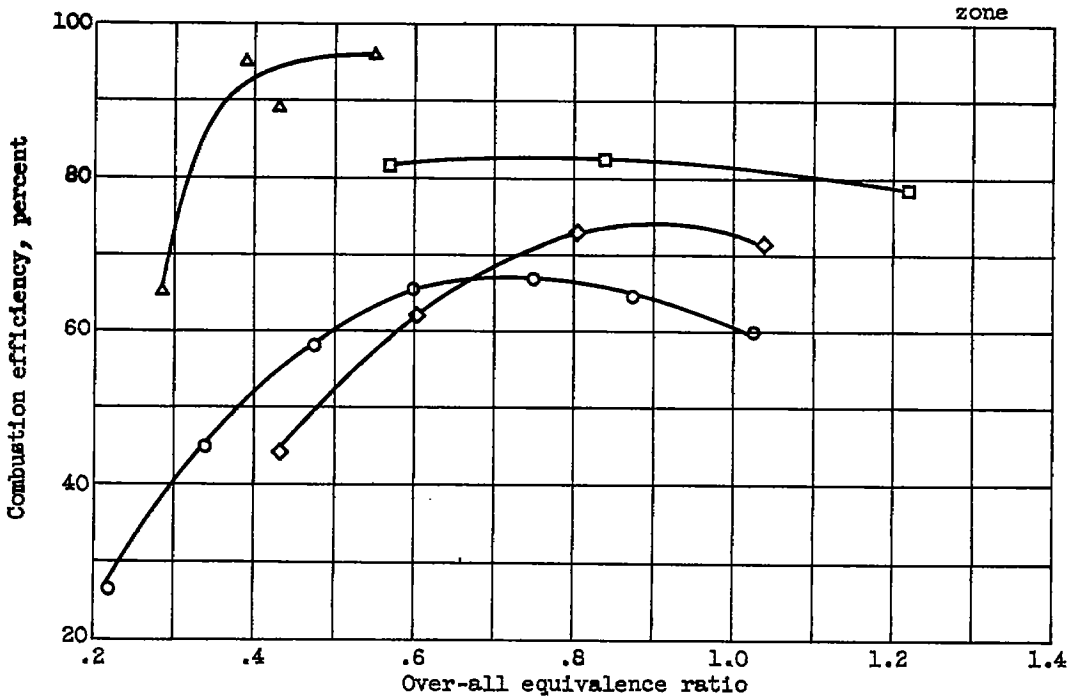


(f) Configuration F. 50-Percent boron in JP-4 injected costream; combustion air vitiated.

Figure 4. - Concluded. Performance of combustor configurations.

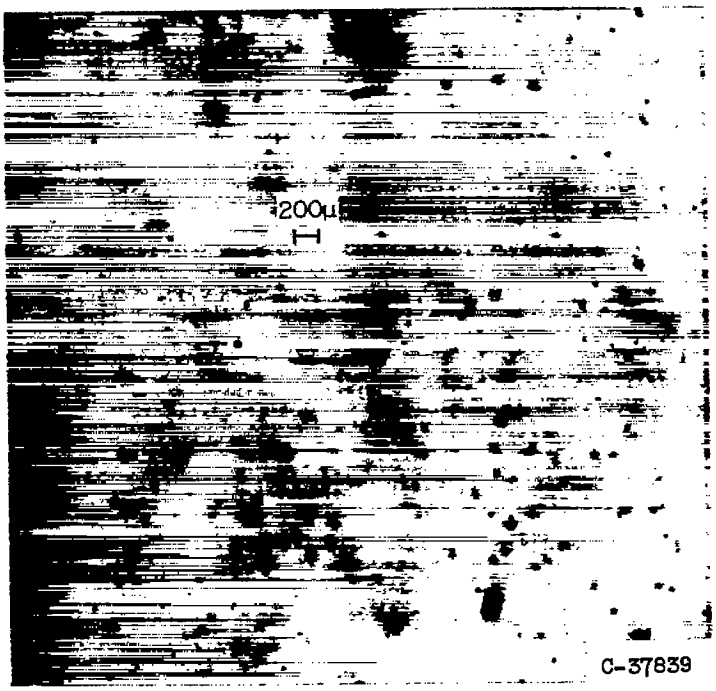


(a) Simulated engine conditions: velocity, 200 feet per second; temperature, 575° F; pressure, 1 atmosphere. Window 7 inches downstream of costream injector.

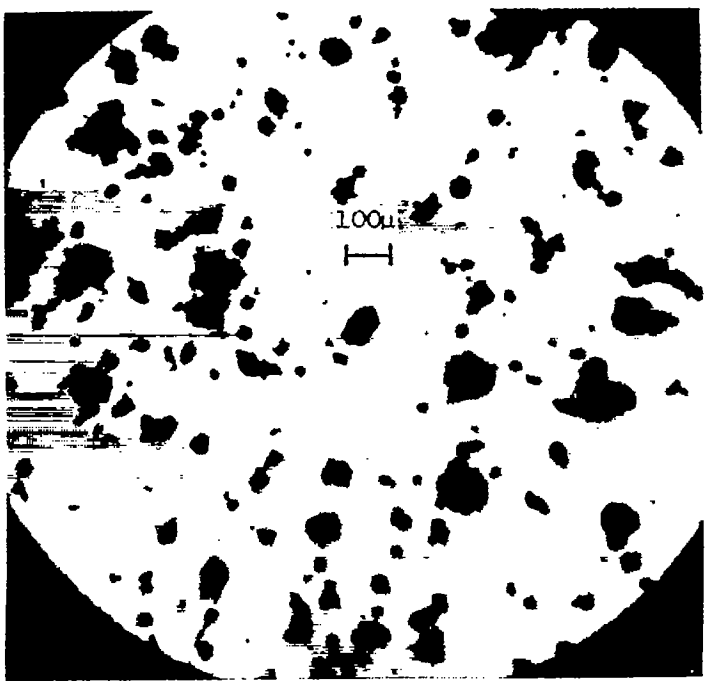


(b) Open-air sample taken 18 inches from injector.

Figure 5. - Photomicrographs of boron slurry spray.

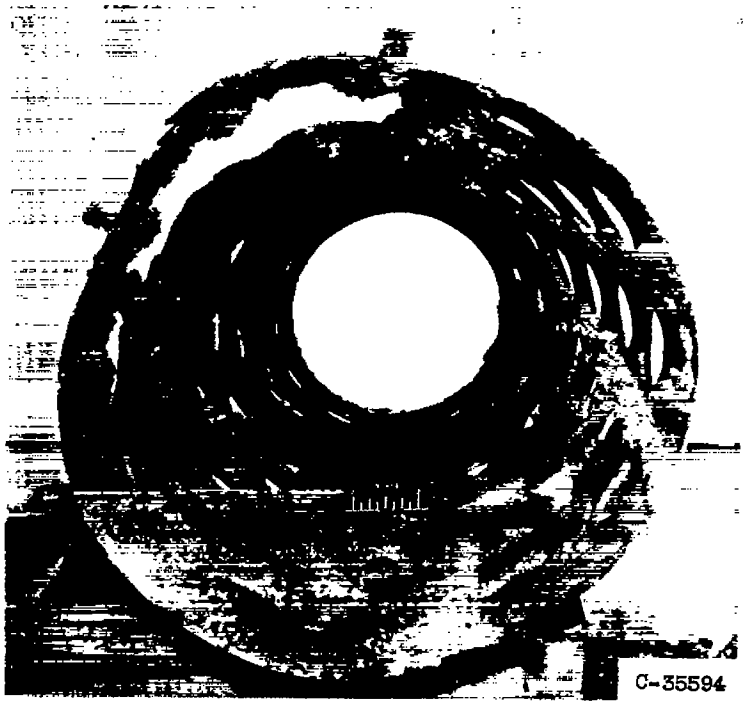


(a) Run 4; slurry injected upstream of flame holder.

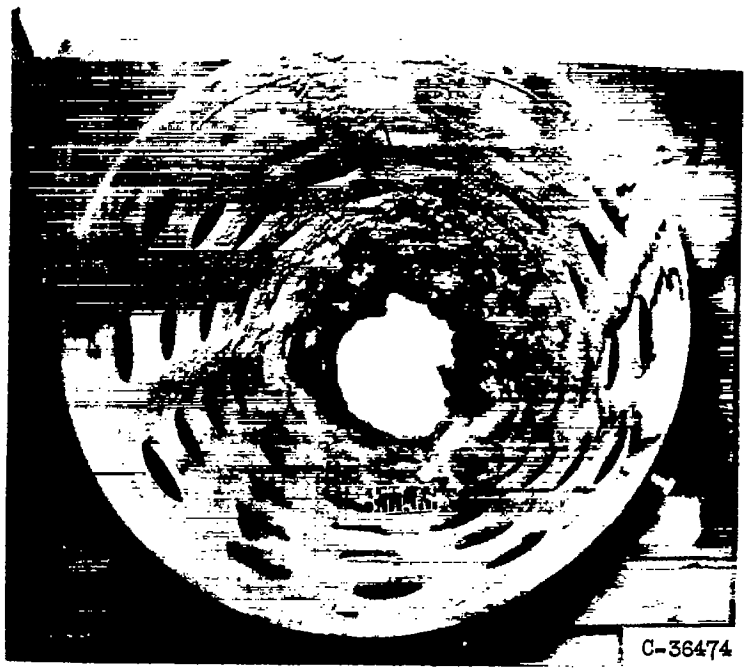


(b) Run 17; slurry injected internally; end view.

Figure 6. - Photographs of flame holders after boron slurry runs.

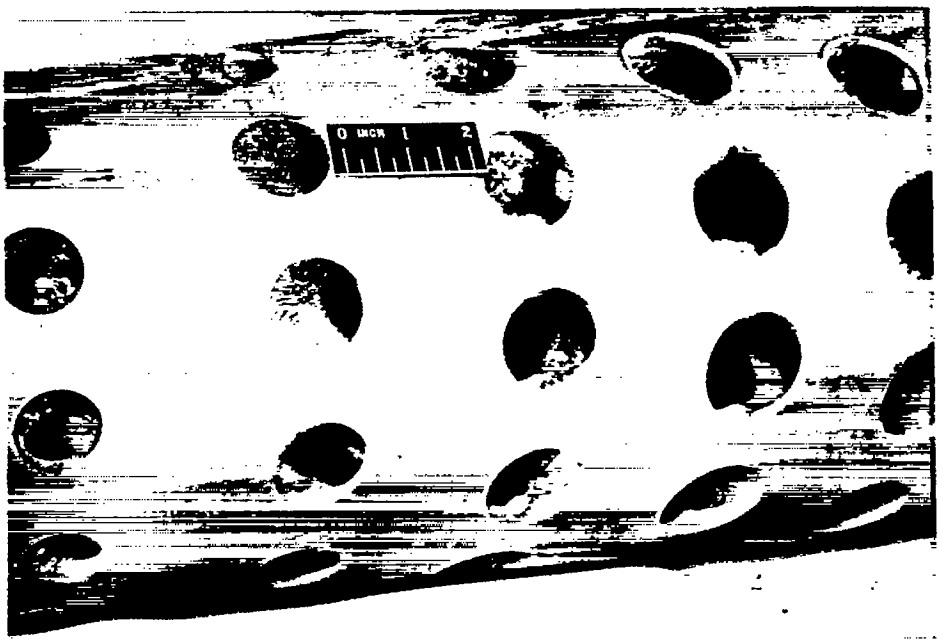


C-36476

(c) Run 17; slurry injected internally; side view.

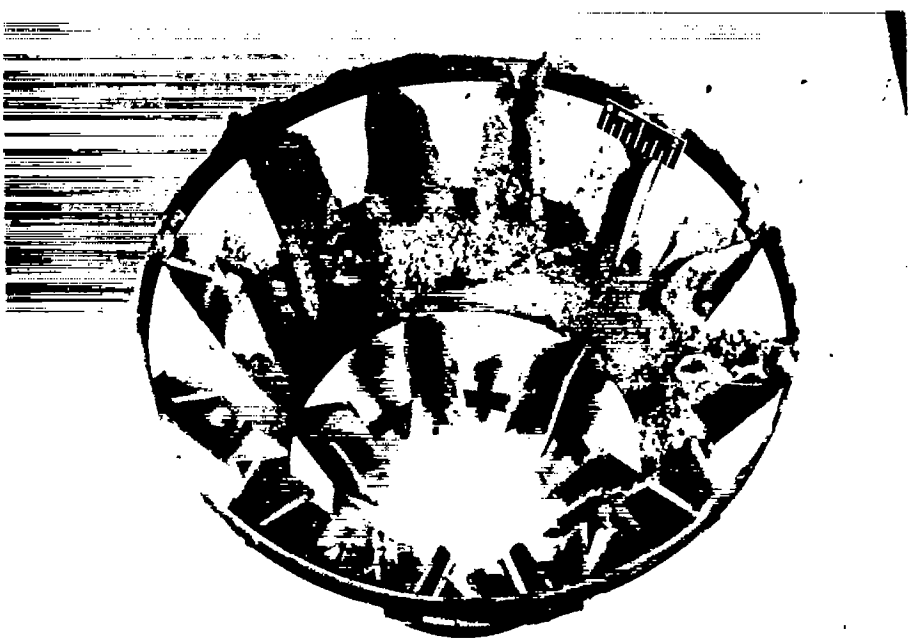

C-35613

(d) Injector plugging; run similar to run 22; slurry injected upstream of flame holder.

Figure 6. - Concluded. Photographs of flame holders after boron slurry runs.



NACA-Langley - 6-1-55 - 325